
www.wonderfloor.co.in

Semi-Commercial Printed Vinyl Flooring



WONDERFLOOR Vinyl Flooring

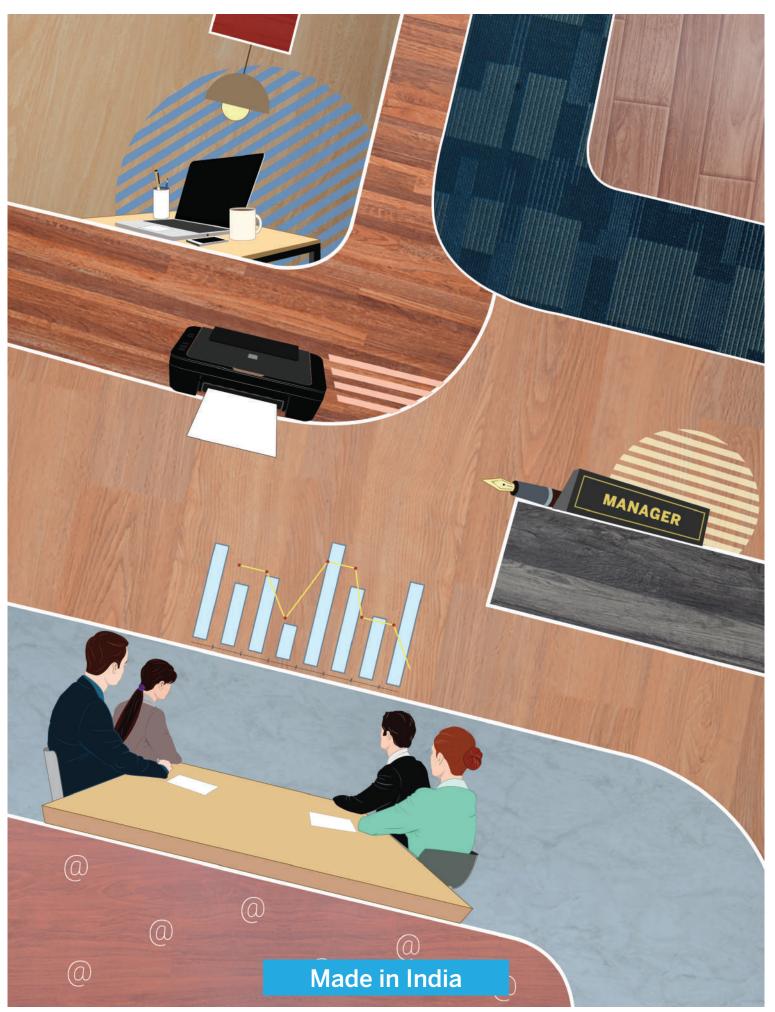


RMG Polyvinyl India Limited, an ISO 9001:2015 systems approved company and is one of the largest manufacturer and exporter of PVC Floor Coverings in India with annual production in excess of 40,000MT (27 Million Sq meters) of residential & heavy duty floorings. Winner of Top Export Award for PVC floor Coverings since several years, the products are exported to Asian countries, Europe, Gulf, Africa and the Americas.


RMG's state-of-the-art plant is located at Sikandarabad (UP) in the Delhi NCR region, the capital of India. The factory boasts of modern calendaring, LVT & cushion vinyl lines to deliver the widest range of flooring products which meet international requirements for abrasion, low smoke & fire retardant properties.

The factory also produces PVC leather, PVC Films & PVC Geomembranes.

RMG's flooring is marketed in India and overseas under the flagship brand WONDERFLOOR. The Wonderfloor product range includes floorings for home interiors, offices, education, healthcare, factories, buses & rail coaches, aerobridges, supermarkets, porta cabins, prefabricated shelters and almost all interior applications.



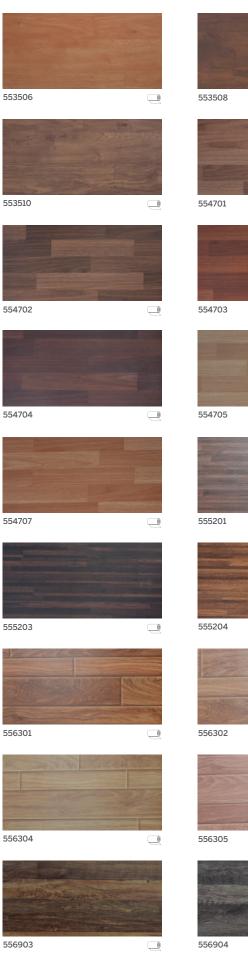

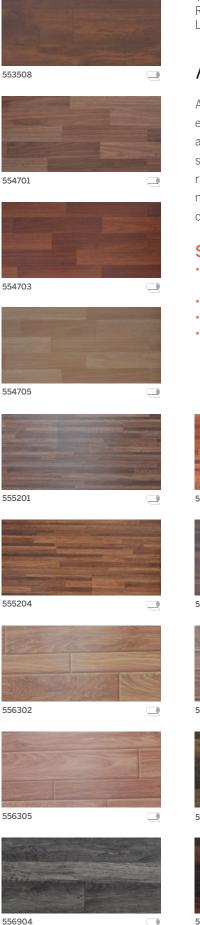

Thickness: 1.50mm Roll width: 2.0 mtrs Length: 20 linear mtr

ANTIQUE

Residential Floorings

Antique is premium compact flooring with an exotic range of wood designs. They are available in natural wood type embossed surfaces and are produced in two meter wide rolls for minimum joints. Antique provides a natural wood look and is ideal for semi commercial applications.

Salient Features

- It is designed to withstand high wear and tear resistance having a wear layer of 0.20 mm
- Available in wood designs
- Natural wooden surface textures
- Application areas: shops, hotels, residences, offices, malls, schools etc





























_



554506

Thickness: 1.30mm Roll width: 2.0 mtrs Length: 20 linear mtr



Premium Printed Floorings

Hitech is premium printed flooring having high quality vinyl flooring. Its is an ideal office flooring, retail flooring and home flooring. There is a huge choice in available patterns. The choice of patterns includes wooden, stone and marble patterns.

Salient Features

- An ideal accessory for beautiful homes, offices, stores and showrooms
- Available in a choice of wooden, stone and marble patterns
- Choose from a wide range from classic to premium designer rolls
- Natural textures imparts elegance and style
- This is a high quality printed floor covering, having same color base and a very tough top wear layer of 0.15 mm
























Thickness: 1.30mm Roll width: 2.0 mtrs Length: 20 linear mtr

2

HITECH


Premium Printed Floorings

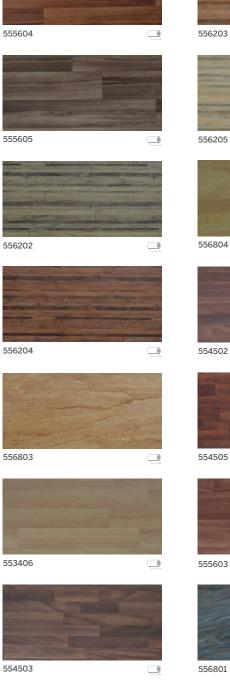


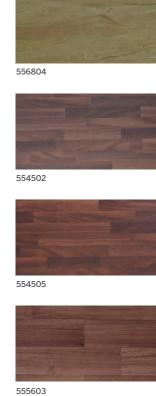



 \square

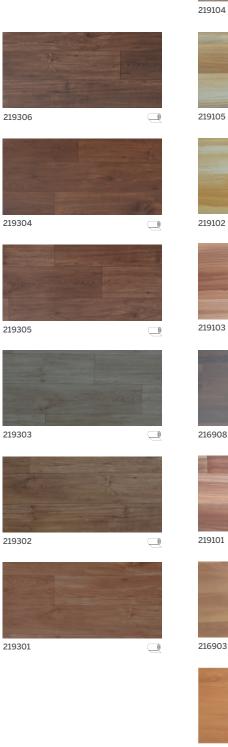

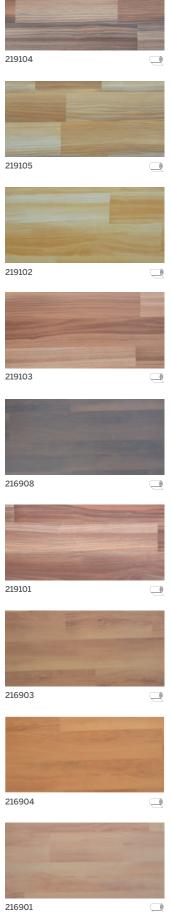

0


Thickness: 1.00 mm Roll Width: 2 mtr Roll Length: 20 linear mtr

DURATEK Residential Floorings

Duratek is elegant, flexible printed flooring with an array of designs and shades to choose from. It is ideal for residential flooring, office flooring and retail flooring. It is available in beautiful patterns and there is a wide ranging choice of patterns.

Salient Features

- These are suitable for residential purposes and offices, retails etc.
- Available thickness 1.00 mm.
- Roll dimension: 2 mtr x 20 mtr

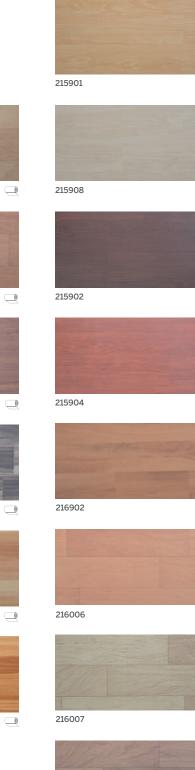

Thickness: 1.00 mm Roll Width: 2 mtr Roll Length: 20 linear mtr

2






















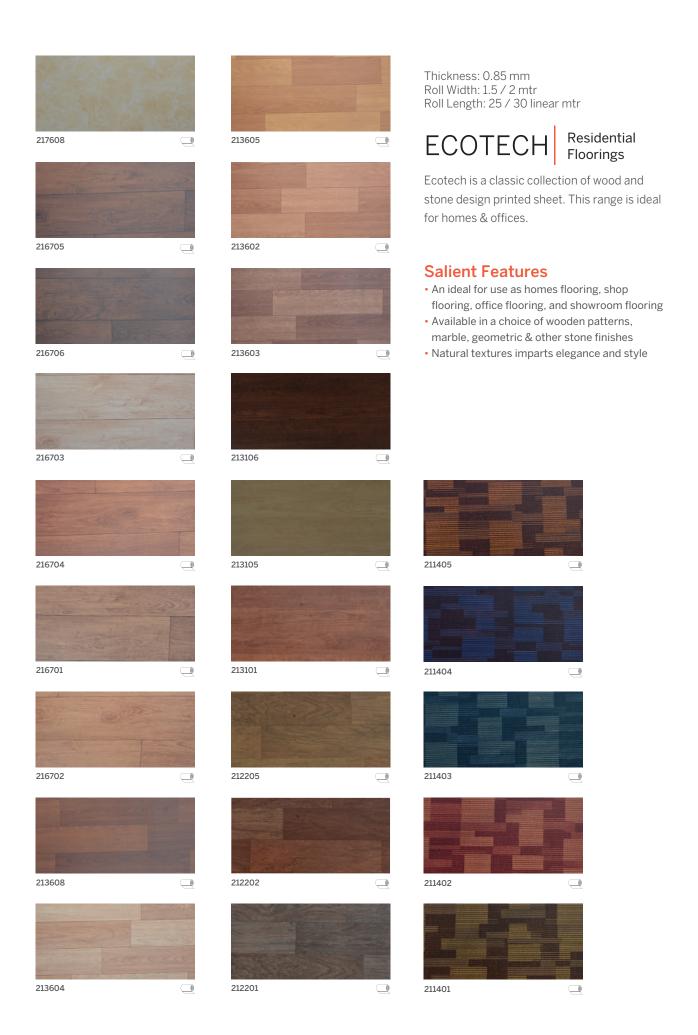

Installed at:

• Small offices • Low foot-fall areas • Residence







THICKNESS (mm)EN 42ROLL WIDTH (mtr)EN 42ROLL LENGTH (mtr)EN 42TILE SIZE (mm)EN 42TOTAL WEIGHT (kgs/sq mtr)EN 43SURFACE PROTECTIONPURSLIP RESISTANCEDIN 52HYGIENE / CLEAN ROOM TESTISO 14RESIDUAL INDENTATION (mm)EN 43DIMENSIONAL STABILITY (%)EN 43BEARING CASTOR CHAIREN 42FIRE PROPAGATIONBS 47SURFACE SPREAD OF FLAMEBS 47HORIZONTAL & VERTICAL BURNING TESTIS 150	1130 / ASTM D2047 1130 / ASTM D2047 1644-1 13 / ISO 23343-1	ANTIQUE/HITECH 1.50/1.30 2.00 20 NA 2.70/2.35 NA R9 / PASS 	DURATEK 1.00 2.00 20 NA 1.80 NA R9 / PASS	ECOTECH 0.85 1.50 / 2.00 25/30 NA 1.53 NA NA
ROLL WIDTH (mtr) EN 42 ROLL LENGTH (mtr) EN 42 TILE SIZE (mm) EN 42 TOTAL WEIGHT (kgs/sq mtr) EN 43 SURFACE PROTECTION PUR SLIP RESISTANCE DIN 53 HYGIENE / CLEAN ROOM TEST ISO 14 RESIDUAL INDENTATION (mm) EN 43 DIMENSIONAL STABILITY (%) EN 43 BEARING CASTOR CHAIR EN 42 FIRE PROPAGATION BS 47 HORIZONTAL & VERTICAL BURNING TEST IS 150	6 / ISO 24341 6 / ISO 24341 7 0 / ISO 23997 1130 / ASTM D2047 1644-1 3 / ISO 23343-1	2.00 20 NA 2.70/2.35 NA R9 / PASS	2.00 20 NA 1.80 NA	1.50 / 2.00 25/30 NA 1.53 NA
ROLL LENGTH (mtr)EN 42TILE SIZE (mm)EN 42TOTAL WEIGHT (kgs/sq mtr)EN 43SURFACE PROTECTIONPURSLIP RESISTANCEDIN 52HYGIENE / CLEAN ROOM TESTISO 14RESIDUAL INDENTATION (mm)EN 43FLEXIBILITY (mm)EN 43BEARING CASTOR CHAIREN 42FIRE PROPAGATIONBS 47SURFACE SPREAD OF FLAMEBS 47HORIZONTAL & VERTICAL BURNING TESTIS 150	16 / ISO 24341 7 10 / ISO 23997 1130 / ASTM D2047 1644-1 13 / ISO 23343-1	20 NA 2.70/2.35 NA R9 / PASS	20 NA 1.80 NA	25/30 NA 1.53 NA
TILE SIZE (mm)EN 42TOTAL WEIGHT (kgs/sq mtr)EN 43SURFACE PROTECTIONPURSLIP RESISTANCEDIN 50HYGIENE / CLEAN ROOM TESTISO 14RESIDUAL INDENTATION (mm)EN 43FLEXIBILITY (mm)EN 43DIMENSIONAL STABILITY (%)EN 43BEARING CASTOR CHAIREN 42FIRE PROPAGATIONBS 47SURFACE SPREAD OF FLAMEBS 47HORIZONTAL & VERTICAL BURNING TESTIS 150	7 10 / ISO 23997 1130 / ASTM D2047 1644-1 13 / ISO 23343-1	NA 2.70/2.35 NA R9 / PASS	NA 1.80 NA	NA 1.53 NA
TOTAL WEIGHT (kgs/sq mtr) EN 43 SURFACE PROTECTION PUR SLIP RESISTANCE DIN 52 HYGIENE / CLEAN ROOM TEST ISO 14 RESIDUAL INDENTATION (mm) EN 43 FLEXIBILITY (mm) EN 43 DIMENSIONAL STABILITY (%) EN 43 BEARING CASTOR CHAIR EN 42 FIRE PROPAGATION BS 47 HORIZONTAL & VERTICAL BURNING TEST IS 150	1130 / ASTM D2047 1130 / ASTM D2047 1644-1 13 / ISO 23343-1	2.70/2.35 NA R9 / PASS	1.80 NA	1.53 NA
SURFACE PROTECTION PUR SLIP RESISTANCE DIN 50 HYGIENE / CLEAN ROOM TEST ISO 14 RESIDUAL INDENTATION (mm) EN 43 FLEXIBILITY (mm) EN 43 DIMENSIONAL STABILITY (%) EN 43 BEARING CASTOR CHAIR EN 42 FIRE PROPAGATION BS 47 SURFACE SPREAD OF FLAME BS 47 HORIZONTAL & VERTICAL BURNING TEST IS 150	1130 / ASTM D2047 4644-1 13 / ISO 23343-1	NA R9 / PASS	NA	NA
SLIP RESISTANCE DIN 50 HYGIENE / CLEAN ROOM TEST ISO 14 RESIDUAL INDENTATION (mm) EN 43 FLEXIBILITY (mm) EN 43 DIMENSIONAL STABILITY (%) EN 43 BEARING CASTOR CHAIR EN 42 FIRE PROPAGATION BS 47 HORIZONTAL & VERTICAL BURNING TEST IS 150	4644-1 13 / ISO 23343-1	R9 / PASS		
HYGIENE / CLEAN ROOM TEST ISO 14 RESIDUAL INDENTATION (mm) EN 43 FLEXIBILITY (mm) EN 43 DIMENSIONAL STABILITY (%) EN 43 BEARING CASTOR CHAIR EN 42 FIRE PROPAGATION BS 47 SURFACE SPREAD OF FLAME BS 47 HORIZONTAL & VERTICAL BURNING TEST IS 150	4644-1 13 / ISO 23343-1		R9/PASS	NA
RESIDUAL INDENTATION (mm) EN 43 FLEXIBILITY (mm) EN 43 DIMENSIONAL STABILITY (%) EN 43 BEARING CASTOR CHAIR EN 42 FIRE PROPAGATION BS 47 SURFACE SPREAD OF FLAME BS 47 HORIZONTAL & VERTICAL BURNING TEST IS 150	3 / ISO 23343-1	< 0.10 mm		
FLEXIBILITY (mm) EN 43 DIMENSIONAL STABILITY (%) EN 43 BEARING CASTOR CHAIR EN 42 FIRE PROPAGATION BS 47 SURFACE SPREAD OF FLAME BS 47 HORIZONTAL & VERTICAL BURNING TEST IS 150		< 0.10 mm		1
DIMENSIONAL STABILITY (%) EN 43 BEARING CASTOR CHAIR EN 42 FIRE PROPAGATION BS 47 SURFACE SPREAD OF FLAME BS 47 HORIZONTAL & VERTICAL BURNING TEST IS 150		3 0.10 mm	≤ 0.10 mm	NA
BEARING CASTOR CHAIR EN 42 FIRE PROPAGATION BS 47 SURFACE SPREAD OF FLAME BS 47 HORIZONTAL & VERTICAL BURNING TEST IS 150	5 / ISO 24344	40 mm MANDREL. PASS	40 mm MANDREL. PASS	40 mm MANDREL. PASS
FIRE PROPAGATION BS 47 SURFACE SPREAD OF FLAME BS 47 HORIZONTAL & VERTICAL BURNING TEST IS 150	4 / ISO 23999	≤ 0.40%	≤ 0.40%	NA
SURFACE SPREAD OF FLAME BS 47 HORIZONTAL & VERTICAL BURNING TEST IS 150	5 / ISO 4918	SUITABLE / CONTINUOUS	SUITABLE / CONTINUOUS	NA
HORIZONTAL & VERTICAL BURNING TEST IS 150	6 PART 6	(I)=10.8 (II)=1.7 } CLASS "0"	(I)=10.8 } CLASS "O" (II)=1.7	NA
	6 PART 7	CLASS 1	CLASS 1	NA
REACTION TO FIRE (kw/m2) EN ISO	061 - 2002			
	0 9239-1			
PERFORMANCE CLASSIFICATION EN 68	5 / ISO 10874	32	32	21,22
ABRASION RESISTANCE EN: 66	60-2	WEAR GROUP M	WEAR GROUP M	NA
SOUND ABSORPTION ISO 14	40-8/EN 1SO 717-2	Δ LW = 3db	Δ LW = 3db	NA
THERMAL RESISTANCE (m2k/w) EN 120	664 / ISO 8302	<0.00568 - PASS	NA	NA
STAIN RESISTANCE EN 42	3 / ISO 26987	1, VERY GOOD RESISTANCE	NA	NA
COLOUR FASTNESS ISO 10)5-B02	> BLUE WOOL STANDARD 5	> BLUE WOOL STANDARD 4	NA
MARITIME USAGES				

* Against Bulk Order

MAINTENANCE



Do's: • After laying of flooring, the surface should be cleaned daily with damp mop and weekly or fortnightly with soap solution • Prevent point load indentation by covering your furniture legs with rubber stopper caps • To remove stubborn stains, rub the affected area immediately with a soft coir brush or fine steel wool soaked in a warm soap solution • Scuff marks on the floor can be removed with little application of diesel • Use door coir or suitable mats to minimize accumulation of dust on Wonderfloor vinyl flooring • Use water to remove any chemical spill on flooring.

Don'ts: • Do not use any strong detergent, harsh cleaning agent or dry steel wool • Throwing of lighted cigarette butts or match sticks on the floor should be avoided as it could lead to burn marks on the floor • Do not drag any heavy object or furniture on the flooring to avoid scratches on the floor.

For institutional/bulk enquiries, please e-mail : mkt@rmgpoly.com or call : +91 9711200510 For export enquiries, please e-mail : info@rmgpoly.com or call : +91 9873138885 / +91 9953208740

RMG POLYVINYL INDIA LIMITED

Registered Office : UGSR 4, Ansals Plaza, Sector 1, Vaishali Ghaziabad 201 010, (U.P) INDIA. Tel.: +91 120-4284802/803/804/805/806.

Fax: +91 11 66173679. E-mail: info@rmgpoly.com

Regional Offices :

- Ahmedabad Bangalore Bhubaneswar Chennai Chandigarh• Guwahati Hyderabad Indore Kolkata Kochi
- Lucknow Mumbai• Pune Patna

WONDERFLOOR is the registered Trade Mark of RMG Polyvinyl India Limited www.wonderfloor.com

