

Dance Flooring



Made in India




RMG Polyvinyl India Limited, an ISO 9001:2015 systems approved company and is one of the largest manufacturer and exporter of PVC Floor Coverings in India with annual production in excess of 40,000MT (27 Million Sq meters) of residential & heavy duty floorings. Winner of Top Export Award for PVC floor Coverings since several years, the products are exported to Asian countries, Europe, Gulf, Africa and the Americas.

RMG's state-of-the-art plant is located at Sikandarabad (UP) in the Delhi NCR region, the capital of India. The factory boasts of modern calendaring, LVT & cushion vinyl lines to deliver the widest range of flooring products which meet international requirements for abrasion, low smoke & fire retardant properties.

The factory also produces PVC leather, PVC Films & PVC Geomembranes.

RMG's flooring is marketed in India and overseas under the flagship brand WONDERFLOOR. The Wonderfloor product range includes floorings for home interiors, offices, education, healthcare, factories, buses & rail coaches, aerobridges, supermarkets, porta cabins, prefabricated shelters and almost all interior applications.

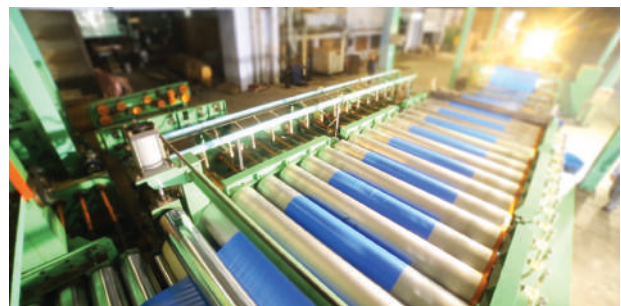


RHYTHM | Dance/Studio Flooring

RHYTHM SWING

Rhythm-Swing is cushioned flooring specially designed for dance applications. These are thick floors with GFT impregnated layer which offers a lay flat feature when the rolls are opened. The tough top layer is available in black, grey or white colour and a soft cushion layer in the bottom provides comfort and cushion while dancing.

Salient Features

- Most suitable for Dance floor applications and for TV Studios which requires a matt finish single colour flooring
- The flooring can be rolled & unrolled several times and ideal for easy storage after use
- Lightweight and convenient while travelling
- The flooring is lay flat and can be cut in smaller sizes for home usage
- Rhythm Swing has higher sound absorption properties
- Also available in Shiny/Glossy finish

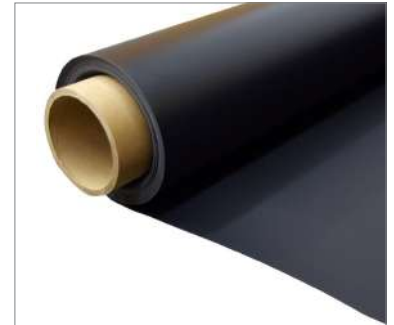

RHYTHM TWIST

For International Market only

Rhythm Twist is reversible compact dance flooring having black colour on one side and choice of white or grey on the other side. The flooring has Impregnated Glass Fibre Reinforcement which makes them lay flat when laid out. The flooring is of compact type which makes it most suitable for certain dance styles.

Salient Features

- Compact and lightweight flooring
- Suitable for TV Studios and Dance floor applications and can be used as per the customers décor and choice




These are reversible types of floors having colour options of black, grey & white

RHYTHM BEATS

Rhythm Beats is a heavy duty flooring suitable for areas such as, theater, stage floors etc. The flooring is designed for permanent installation and is suitable for long time usage.

The flooring is produced without glass fibre tissue impregnation and is designed for use where flooring is pasted with adhesive on the sub floor for permanent installation. Joints may need thermo welding.

Available in exciting range of colours: Silver, Golden Shiny Black & Shiny White

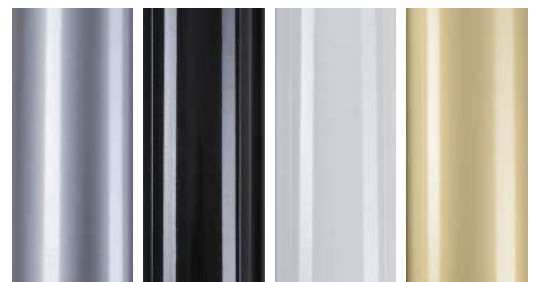



PERFORMANCE CHARACTERISTICS

CHARACTERISTICS	TEST METHOD	RHYTHM TWIST	RHYTHM SWING	RHYTHM BEATS
THICKNESS (mm)	EN 428 / ISO 24346	1.20	2.00	1.20/1.50/2.00
ROLL WIDTH (mtr)	EN 426 / ISO 24341	2.00	2.00	2.00
ROLL LENGTH (mtr)	EN 426 / ISO 24341	15 / 20	15 / 20	15 / 20
TILE SIZE (mm)	EN 427	NA	NA	NA
TOTAL WEIGHT (kgs/sq mtr)	EN 430 / ISO 23997	1.60	1.40	2.00/2.60/3.40
SURFACE PROTECTION	PUR	NA	NA	NA
SLIP RESISTANCE	DIN 51130 / ASTM D2047	R9	R9	R9
HYGIENE / CLEAN ROOM TEST	ISO 14644-1	NA	NA	NA
RESIDUAL INDENTATION (mm)	EN 433 / ISO 23343-1	≤ 0.12 mm	≤ 0.12 mm	≤ 0.12 mm
FLEXIBILITY (mm)	EN 435 / ISO 24344	20 mm MANDREL. PASS	20 mm MANDREL. PASS	20 mm MANDREL. PASS
DIMENSIONAL STABILITY (%)	EN 434 / ISO 23999	≤ 0.10%	≤ 0.10%	≤ 0.40%
BEARING CASTOR CHAIR	EN 425 / ISO 4918	SUITABLE / CONTINUOUS	SUITABLE / CONTINUOUS	SUITABLE / CONTINUOUS
FIRE PROPAGATION	BS 476 PART 6	(I)=10.8 (II)=1.7 } CLASS "0"	(I)=10.8 (II)=1.7 } CLASS "0"	(I)=10.8 (II)=1.7 } CLASS "0"
SURFACE SPREAD OF FLAME	BS 476 PART 7	CLASS 1	CLASS 1	CLASS 1
ANTI-FUNGAL/ANTI-BACTERIAL TEST	ISO846 A,C / ISO 22196	>99% Inhibits Growth	>99% Inhibits Growth	>99% Inhibits Growth
REACTION TO FIRE (kw/m2)	EN ISO 9239-1	> 8 / PASS Bfl-S1	Cfl-S1	> 8 / PASS Bfl-S1
PERFORMANCE CLASSIFICATION	EN 685 / ISO 10874	32,34	32,34	33,34
ABRASION RESISTANCE	EN: 660-2	WEAR GROUP T	WEAR GROUP P	WEAR GROUP M
SOUND ABSORPTION	ISO 140-8/EN ISO 717-2	Δ LW = 4db	Δ LW = 14db	Δ LW = 2db
THERMAL RESISTANCE (m2k/w)	EN 12664 / ISO 8302	<0.00568 - PASS	<0.00568 - PASS	<0.00568 - PASS
STAIN RESISTANCE	EN 423 / ISO 26987	0, EXCELLENT RESISTANCE	0, EXCELLENT RESISTANCE	0, EXCELLENT RESISTANCE
COLOUR FASTNESS	ISO 105-B02	> BLUE WOOL STANDARD 5	> BLUE WOOL STANDARD 5	> BLUE WOOL STANDARD 5
PRODUCTION PROCESS		SPREAD COATING & GFT IMPREGNATED		CALENDARING & LAMINATION

* Against Bulk Order



MAINTENANCE

Do's: • After laying of flooring, the surface should be cleaned daily with damp mop and weekly or fortnightly with soap solution • Prevent point load indentation by covering your furniture legs with rubber stopper caps • To remove stubborn stains, rub the affected area immediately with a soft coir brush or fine steel wool soaked in a warm soap solution • Scuff marks on the floor can be removed with little application of diesel • Use door coir or suitable mats to minimize accumulation of dust on Wonderfloor vinyl flooring • Use water to remove any chemical spill on flooring.

Don'ts: • Do not use any strong detergent, harsh cleaning agent or dry steel wool • Throwing of lighted cigarette butts or match sticks on the floor should be avoided as it could lead to burn marks on the floor • Do not drag any heavy object or furniture on the flooring to avoid scratches on the floor.

For export enquiries, please e-mail : info@rmgpoly.com

or call : +91 9873138885 / +91 9953208740

For institutional/bulk enquiries, please e-mail : mkt@rmgpoly.com

or call : +91 9711200510

RMG POLYVINYL INDIA LIMITED

Registered Office : UGSR 4, Ansals Plaza, Sector 1, Vaishali Ghaziabad 201 010, (U.P) INDIA. Tel.: +91

120-4284802/803/804/805/806.

Fax: +91 11 66173679. E-mail: info@rmgpoly.com

Regional Offices :

• Ahmedabad • Bangalore • Bhubaneswar • Chennai • Chandigarh • Guwahati • Hyderabad • Indore • Kolkata • Kochi
• Lucknow • Mumbai • Pune • Patna

WONDERFLOOR is the registered Trade Mark of RMG Polyvinyl India Limited www.wonderfloor.com

