

**WONDERFLOOR**

[www.wonderfloor.co.in](http://www.wonderfloor.co.in)

**ANTIQUE**




**MADE  
in  
INDIA**

**Lifestyle Flooring**

# ANTIQU




553506

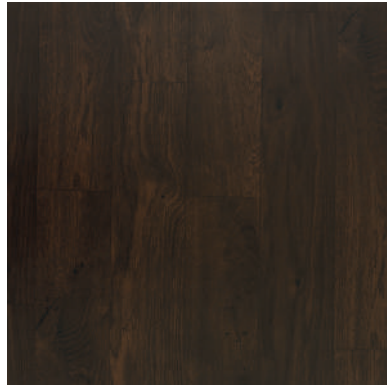


553508




553510

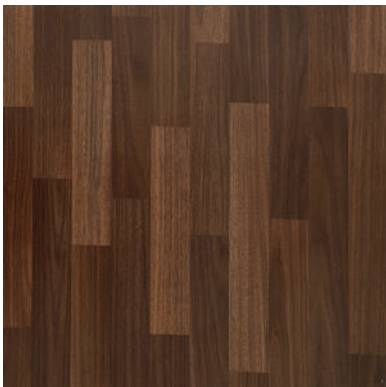


554701

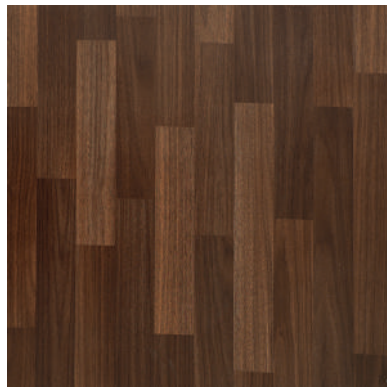

554702

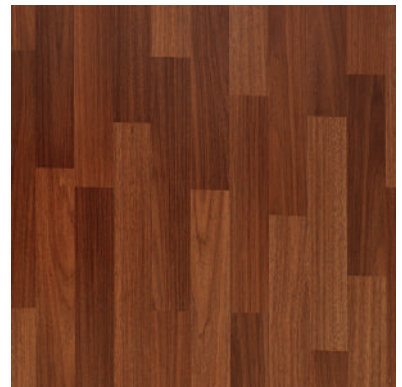

554703

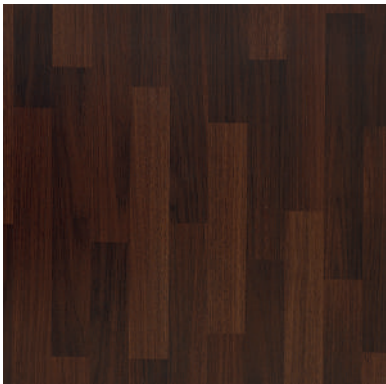

554704




554705




554707



555201

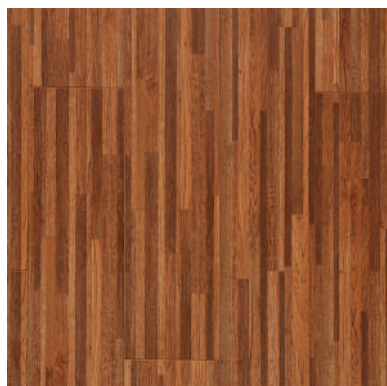

555202

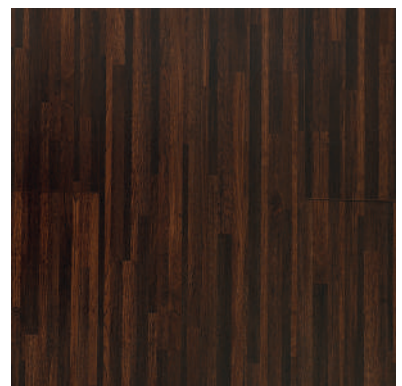


555203

# ANTIQU



555204

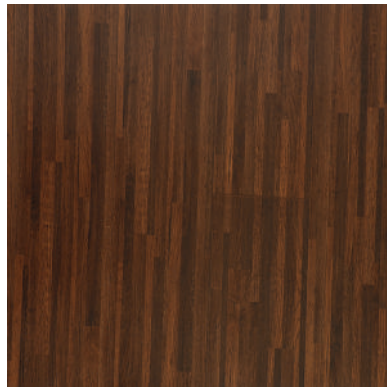


555205



556301



556302

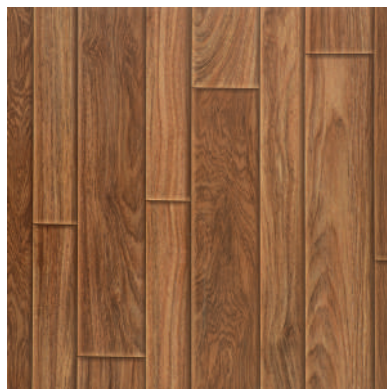

556303



556304



556305




556902



556903



556904

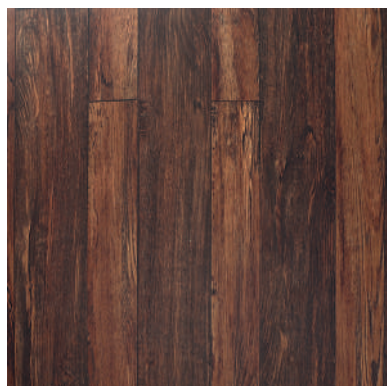

556905



557307

**WONDERFLOOR**

www.wonderfloor.co.in


# ANTIQUÉ



557308



559801

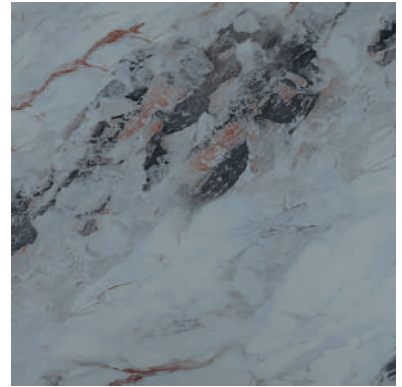

559802



559803



559804



**INTEGRAL UNIVERSITY - LUCKNOW**  
PRODUCT: ANTIQUE



**FORTIS HOSPITAL, VASHI, MUMBAI**  
PRODUCT: ANTIQUE

**WONDERFLOOR** - The world-class vinyl flooring is a quality product from RMG Polyvinyl India Limited, an ISO 9001:2015 systems certified company. We are the largest manufacturer & exporter of PVC floor coverings, film, sheeting and artificial leather. We manufacture a wide range of vinyl flooring in state-of-the art plant & machinery equipped with latest technology and optimum quality control. Wonderfloor has a wide sales distribution network across India.

**Antique** is an ideal flooring for residential and semi commercial applications. Antique bornes a high strength wear layer which makes it resistant to heavy foot fall and ensures that the flooring has a long life. It is available in wooden designs and wooden embossing's which provide a seamless natural wood look and help replicate the beauty. This premium range of flooring also provides a decent level of sound and heat insulation.

## PERFORMANCE CHARACTERISTICS

CHARACTERISTICS	TEST METHOD	RESULTS
THICKNESS (mm)	EN 428	1.50
ROLL WIDTH (mtr)	EN 426	2.00
ROLL LENGTH (mtr)	EN 426	20
TOTAL WEIGHT (kgs/sq mtr)	EN 430	2.70
SLIP RESISTANCE	DIN 51130 / ASTM D2047	R9 / PASS
RESIDUAL INDENTATION (mm)	EN 433	≤ 0.10 mm
FLEXIBILITY (mm)	EN 435	40 mm MANDREL. PASS
DIMENSIONAL STABILITY (%)	EN 434	≤ 0.40%
BEARING CASTOR CHAIR	EN 425	SUITABLE / CONTINUOUS
FIRE PROPAGATION	BS 476 PART 6	(I)=10.8 } CLASS "O" (II)=1.7
SURFACE SPREAD OF FLAME	BS 476 PART 7	CLASS 1
PERFORMANCE CLASSIFICATION	EN 685	32
ABRASION RESISTANCE	EN: 660-2	WEAR GROUP M
SOUND ABSORPTION	ISO 140-8/EN ISO 717-2	Δ LW = 3db
COLOUR FASTNESS	ISO 105-B02	> BLUE WOOL STANDARD 5



### RECOMMENDATION FOR INSTALLATION

Wonderfloor sheet must be allowed to relax for 24 hours in room temperature between 18°C and 27°C prior to installation. Vinyl rolls are suitable for laying on any surface such as concrete, steel wooden floors etc. provided the sub-floor is even, hard and dry. Damp floors should be dried before the commencement of laying. Before installation, the base floor must be thoroughly clean, dry and free from grease & grit. Wonderfloor recommends use of Fevicol SR 998, Fevicol SR 505 or any other equivalent rubber/acrylic/water based adhesive of similar type.

### MAINTENANCE

**Do's:** • After laying of flooring, the surface should be cleaned daily with damp mop and weekly or fortnightly with soap solution • Prevent point load indentation by covering your furniture legs with rubber stopper caps • To remove stubborn stains, rub the affected area immediately with a soft coir brush or fine steel wool soaked in a warm soap solution • Scuff marks on the floor can be removed with little application of diesel • Use door coir or suitable mats to minimize accumulation of dust on Wonderfloor vinyl flooring • Use water to remove any chemical spill on flooring.

**Don'ts:** • Do not use any strong detergent, harsh cleaning agent or dry steel wool • Throwing of lighted cigarette butts or match sticks on the floor should be avoided as it could lead to burn marks on the floor • Do not drag any heavy object or furniture on the flooring to avoid scratches on the floor.

For institutional/bulk enquiries, please e-mail : [mkt@rmgpoly.com](mailto:mkt@rmgpoly.com)

or call : +91 9015313059 (Available between 10am-6:30pm)

For export enquiries, please e-mail : [info@rmgpoly.com](mailto:info@rmgpoly.com) or call : +91 9873138885

## RMG POLYVINYL INDIA LIMITED

WONDERFLOOR is the registered Trade Mark of RMG Polyvinyl India Limited

