

WONDERFLOOR

www.wonderfloor.co.in


ANTIQUE




**MADE
in
INDIA**

Lifestyle Flooring

ANTIQUE

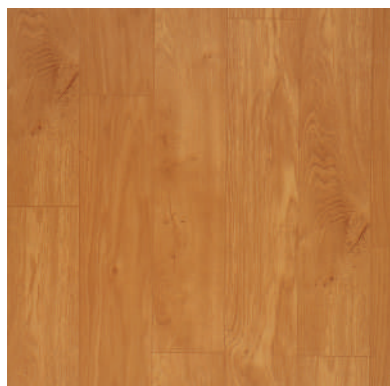


553506

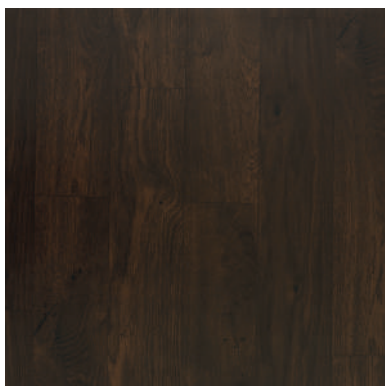


553508




553510

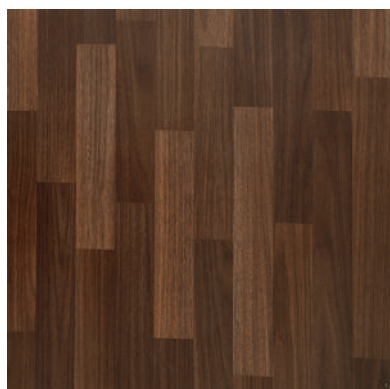


554701

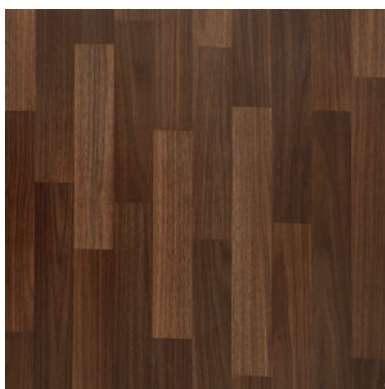


554702

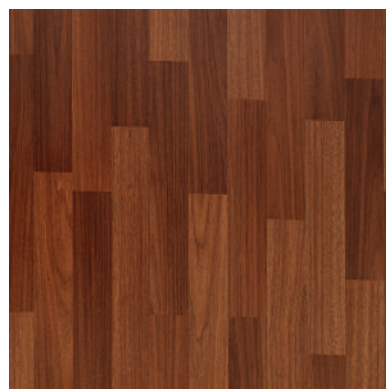

554703

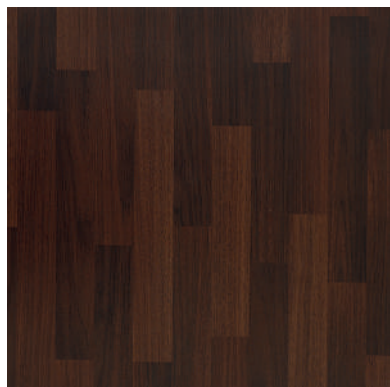


554704

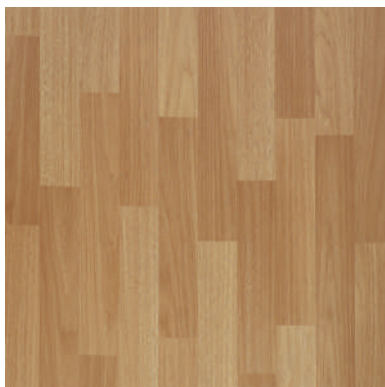


554705




554707

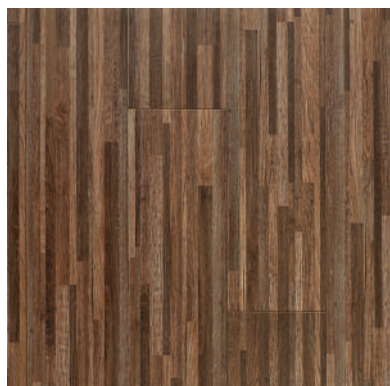

555201

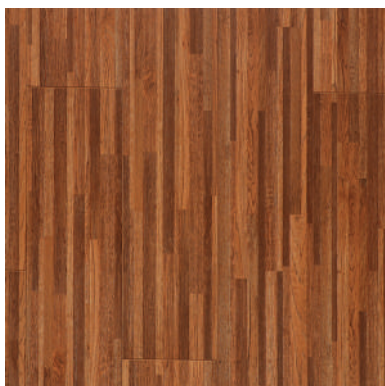

555202

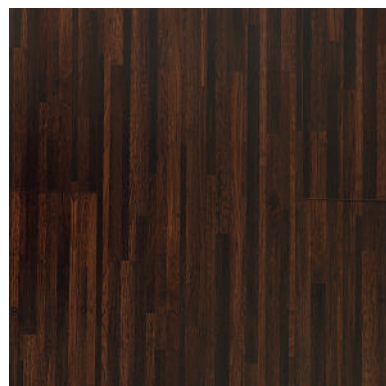


555203

ANTIQUE



555204

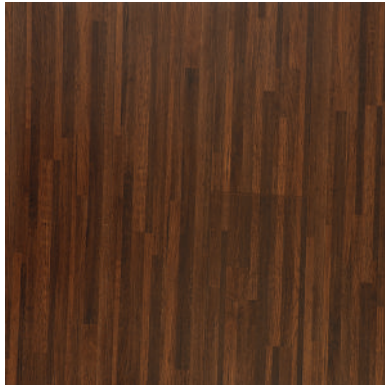


555205



556301



556302

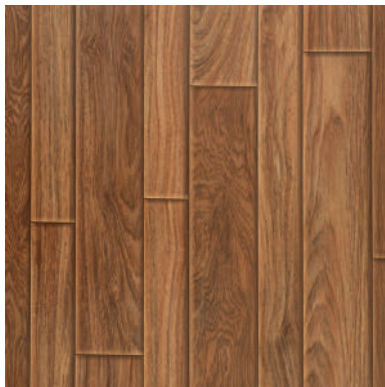

556303



556304



556305




556902



556903



556904

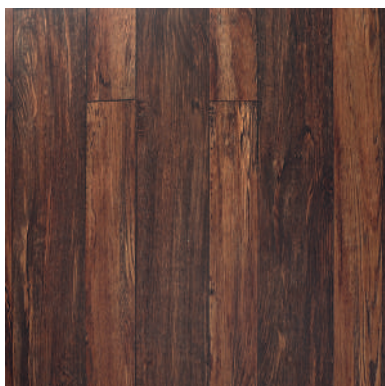

556905



557307

WONDERFLOOR

www.wonderfloor.co.in

ANTIQUE



557308



INTEGRAL UNIVERSITY - LUCKNOW
PRODUCT: ANTIQUE



FORTIS HOSPITAL, VASHI, MUMBAI
PRODUCT: ANTIQUE

WONDERFLOOR - The world-class vinyl flooring is a quality product from RMG Polyvinyl India Limited, an ISO 9001:2015 systems certified company. We are the largest manufacturer & exporter of PVC floor coverings, film, sheeting and artificial leather. We manufacture a wide range of vinyl flooring in state-of-the art plant & machinery equipped with latest technology and optimum quality control. Wonderfloor has a wide sales distribution network across India.

Antique is an ideal flooring for residential and semi commercial applications. Antique bornes a high strength wear layer which makes it resistant to heavy foot fall and ensures that the flooring has a long life. It is available in wooden designs and wooden embossing’s which provide a seamless natural wood look and help replicate the beauty. This premium range of flooring also provides a decent level of sound and heat insulation.

PERFORMANCE CHARACTERISTICS

CHARACTERISTICS	TEST METHOD	RESULTS
THICKNESS (mm)	EN 428	1.50
ROLL WIDTH (mtr)	EN 426	2.00
ROLL LENGTH (mtr)	EN 426	20
TOTAL WEIGHT (kgs/sq mtr)	EN 430	2.70
SLIP RESISTANCE	DIN 51130 / ASTM D2047	R9 / PASS
RESIDUAL INDENTATION (mm)	EN 433	≤ 0.10 mm
FLEXIBILITY (mm)	EN 435	40 mm MANDREL. PASS
DIMENSIONAL STABILITY (%)	EN 434	≤ 0.40%
BEARING CASTOR CHAIR	EN 425	SUITABLE / CONTINUOUS
FIRE PROPAGATION	BS 476 PART 6	(I)=10.8 (II)=1.7 } CLASS “O”
SURFACE SPREAD OF FLAME	BS 476 PART 7	CLASS 1
PERFORMANCE CLASSIFICATION	EN 685	32
ABRASION RESISTANCE	EN: 660-2	WEAR GROUP M
SOUND ABSORPTION	ISO 140-8/EN ISO 717-2	Δ LW = 3db
COLOUR FASTNESS	ISO 105-B02	> BLUE WOOL STANDARD 5



RECOMMENDATION FOR INSTALLATION

Wonderfloor sheet must be allowed to relax for 24 hours in room temperature between 18°C and 27°C prior to installation. Vinyl rolls are suitable for laying on any surface such as concrete, steel wooden floors etc. provided the sub-floor is even, hard and dry. Damp floors should be dried before the commencement of laying. Before installation, the base floor must be thoroughly clean, dry and free from grease & grit. Wonderfloor recommends use of Fevicol SR 998, Fevicol SR 505 or any other equivalent rubber/acrylic/water based adhesive of similar type.

MAINTENANCE

Do's: • After laying of flooring, the surface should be cleaned daily with damp mop and weekly or fortnightly with soap solution • Prevent point load indentation by covering your furniture legs with rubber stopper caps • To remove stubborn stains, rub the affected area immediately with a soft coir brush or fine steel wool soaked in a warm soap solution • Scuff marks on the floor can be removed with little application of diesel • Use door coir or suitable mats to minimize accumulation of dust on Wonderfloor vinyl flooring • Use water to remove any chemical spill on flooring.

Don'ts: • Do not use any strong detergent, harsh cleaning agent or dry steel wool • Throwing of lighted cigarette butts or match sticks on the floor should be avoided as it could lead to burn marks on the floor • Do not drag any heavy object or furniture on the flooring to avoid scratches on the floor.

For institutional/bulk enquiries, please e-mail : mkt@rmgpoly.com
or call : +91 9015313059 (Available between 10am-6:30pm)
For export enquiries, please e-mail : info@rmgpoly.com or call : +91 9873138885

RMG POLYVINYL INDIA LIMITED
WONDERFLOOR is the registered Trade Mark of RMG Polyvinyl India Limited

