

WONDERFLOOR

www.wonderfloor.co.in

**BRAAVO
BRAAVO ELITE**

PUR

MADE
in
INDIA


Sports & Fitness Flooring




WONDERFLOOR

www.wonderfloor.co.in

BRAAVO 4.5mm

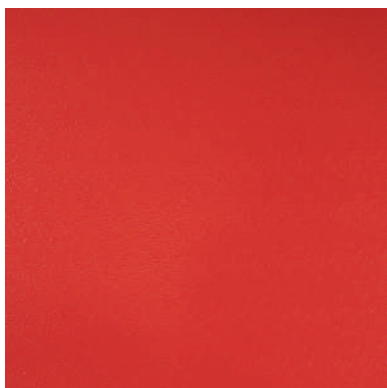

ACE 091 CHERRY RED

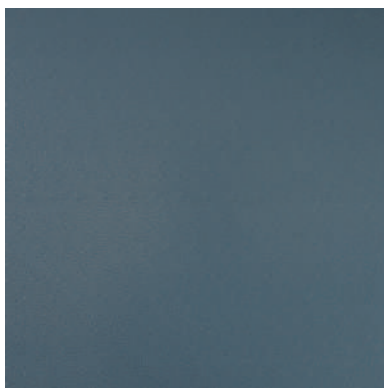


ACE 092 BLUE



ACE 093 ORANGE




ACE 094 GREEN

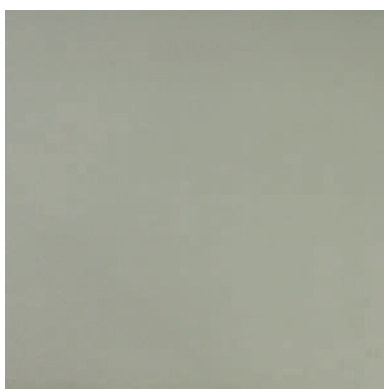

ACE 095 NEO SILVER




ACE 096 YELLOW

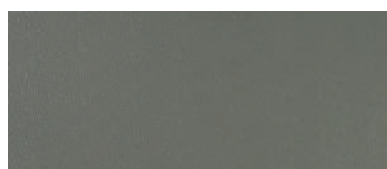


ACE 097 IRON GREY



AR 051

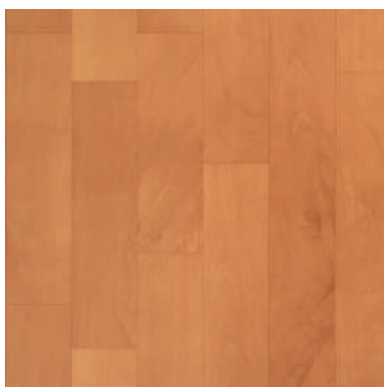


AR 053

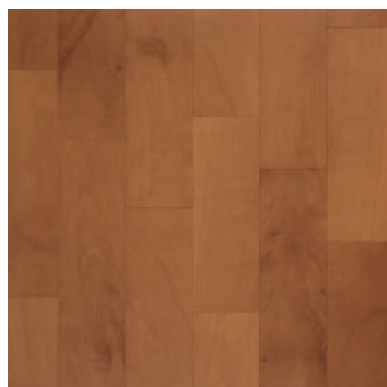

AR 054



AR 055

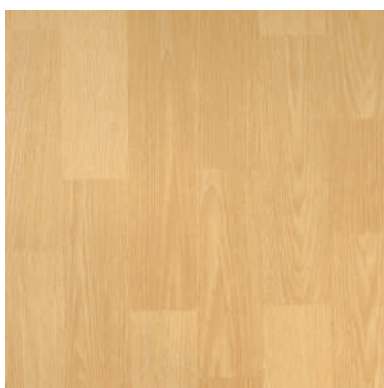

AR 056



AR 057

WONDERFLOOR

www.wonderfloor.co.in

BRAAVO SPORTS 4.5mm
BRAAVO ELITE 6.5mm

BRAAVO SPORTS
4.5MM



SPT 081 CAPRI BLUE



SPT 082 MEADOWS GREEN

BRAAVO ELITE
6.5MM



ELITE RED 081




ELITE BLUE 082



ELITE ORANGE-083




ELITE GREEN 084

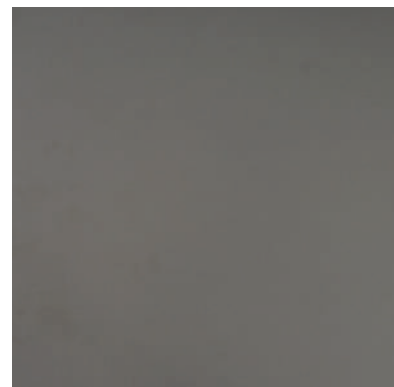

ELITE GRAY 087



ELITE WOOD-085A

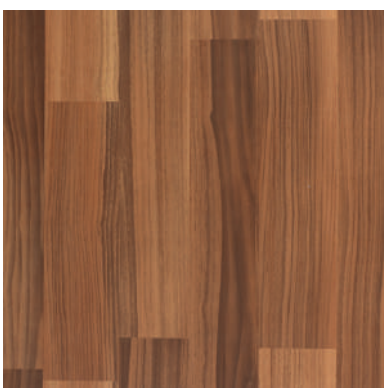

ELITE WOOD 086

WONDERFLOOR - The world-class vinyl flooring is a quality product from RMG Polyvinyl India Limited, an ISO 9001:2015 systems certified company. We are the largest manufacturer & exporter of PVC floor coverings, film, sheeting and artificial leather. We manufacture a wide range of vinyl flooring in state-of-the art plant & machinery equipped with latest technology and optimum quality control. Wonderfloor has a wide sales distribution network across India.

PERFORMANCE CHARACTERISTICS

CHARACTERISTICS	TEST METHOD	BRAAVO / BRAAVO SPORTS	BRAAVO ELITE
THICKNESS	EN 428	4.50 MM	6.50 MM
WEAR LAYER	-	0.50 MM	1.00 MM
ROLL DIMENTION	EN 426	2 MTR X 15.00 LINEAR MTR	2 MTR X 15.00 LINEAR MTR
TOTAL WEIGHT	EN 430	3.30 KG/SQ	4.30 KG/SQ
DIMENSIONAL STABILITY	EN 434	≤0.10%	≤0.10%
RESIDUAL INDENTATION	EN 433	≤ 0.40 MM	≤ 0.40 MM
FLEXIBILITY	EN 435	20 MM MANDREL. PASS	20 MM MANDREL. PASS
ABRASION RESISTANCE	EN: 660-2	WEAR GROUP T	WEAR GROUP T
HORIZONTAL & VERTICAL BURN TEST	IA 15061-2002	PASS (ARAI)	PASS (ARAI)
FIRE PROPAGATION	BS 476 PART 6	(I)=10.8 } CLASS "0" (II)=1.7 }	(I)=10.8 } CLASS "0" (II)=1.7 }
HYGIENE		TEST RESULTS DEMONSTRATES THAT IT INHIBITS GROWTH OF MICROBES	TEST RESULTS DEMONSTRATES THAT IT INHIBITS GROWTH OF MICROBES
COLOUR FASTNESS TO DAY LIGHT	ISO 105-B02	> BLUE WOOL STANDARD 5	> BLUE WOOL STANDARD 5
SLIP RESISTANCE	DIN 51130	R9	R9
BEARING A CASTOR CHAIR	EN 425	SUITABLE/CONTINUOUS USE	SUITABLE/CONTINUOUS USE
RESISTANCE TO CHEMICALS	EN 423	NO VISIBLE CHANGE	NO VISIBLE CHANGE
SOUND ABSORPTION	ISO 140-8/EN ISO 717-2	Δ LW = 18 DB	Δ LW = 24 DB
PERFORMANCE CLASSIFICATION	EN 685	33,34	33,34
SURFACE PROTECTION	PUR	PUR PROTECTION	PUR PROTECTION



RECOMMENDATION FOR INSTALLATION

Wonderfloor sheet must be allowed to relax for 24 hours in room temperature between 18°C and 27°C prior to installation. Vinyl rolls are suitable for laying on any surface such as concrete, steel wooden floors etc. provided the sub-floor is even, hard and dry. Damp floors should be dried before the commencement of laying. Before installation, the base floor must be thoroughly clean, dry and free from grease & grit. Wonderfloor recommends use of Fevicol SR 998, Fevicol SR 505 or any other equivalent rubber/acrylic/water based adhesive of similar type.

MAINTENANCE

Do's: • After laying of flooring, the surface should be cleaned daily with damp mop and weekly or fortnightly with soap solution • Prevent point load indentation by covering your furniture legs with rubber stopper caps • To remove stubborn stains, rub the affected area immediately with a soft cor brush or fine steel wool soaked in a warm soap solution • Scuff marks on the floor can be removed with little application of diesel • Use door coir or suitable mats to minimize accumulation of dust on Wonderfloor vinyl flooring • Use water to remove any chemical spill on flooring.

Don'ts: • Do not use any strong detergent, harsh cleaning agent or dry steel wool • Throwing of lighted cigarette butts or match sticks on the floor should be avoided as it could lead to burn marks on the floor • Do not drag any heavy object or furniture on the flooring to avoid scratches on the floor.

For institutional/bulk enquiries, please e-mail : mkt@rmgpoly.com

or call : +91 9711200510

For export enquiries, please e-mail : info@rmgpoly.com

or call : +91 9873138885 / +91 9953208740

RMG POLYVINYL INDIA LIMITED

WONDERFLOOR is the registered Trade Mark of RMG Polyvinyl India Limited

