


WONDERFLOOR



www.wonderfloor.co.in

**BRAAVO
BRAAVO ELITE**

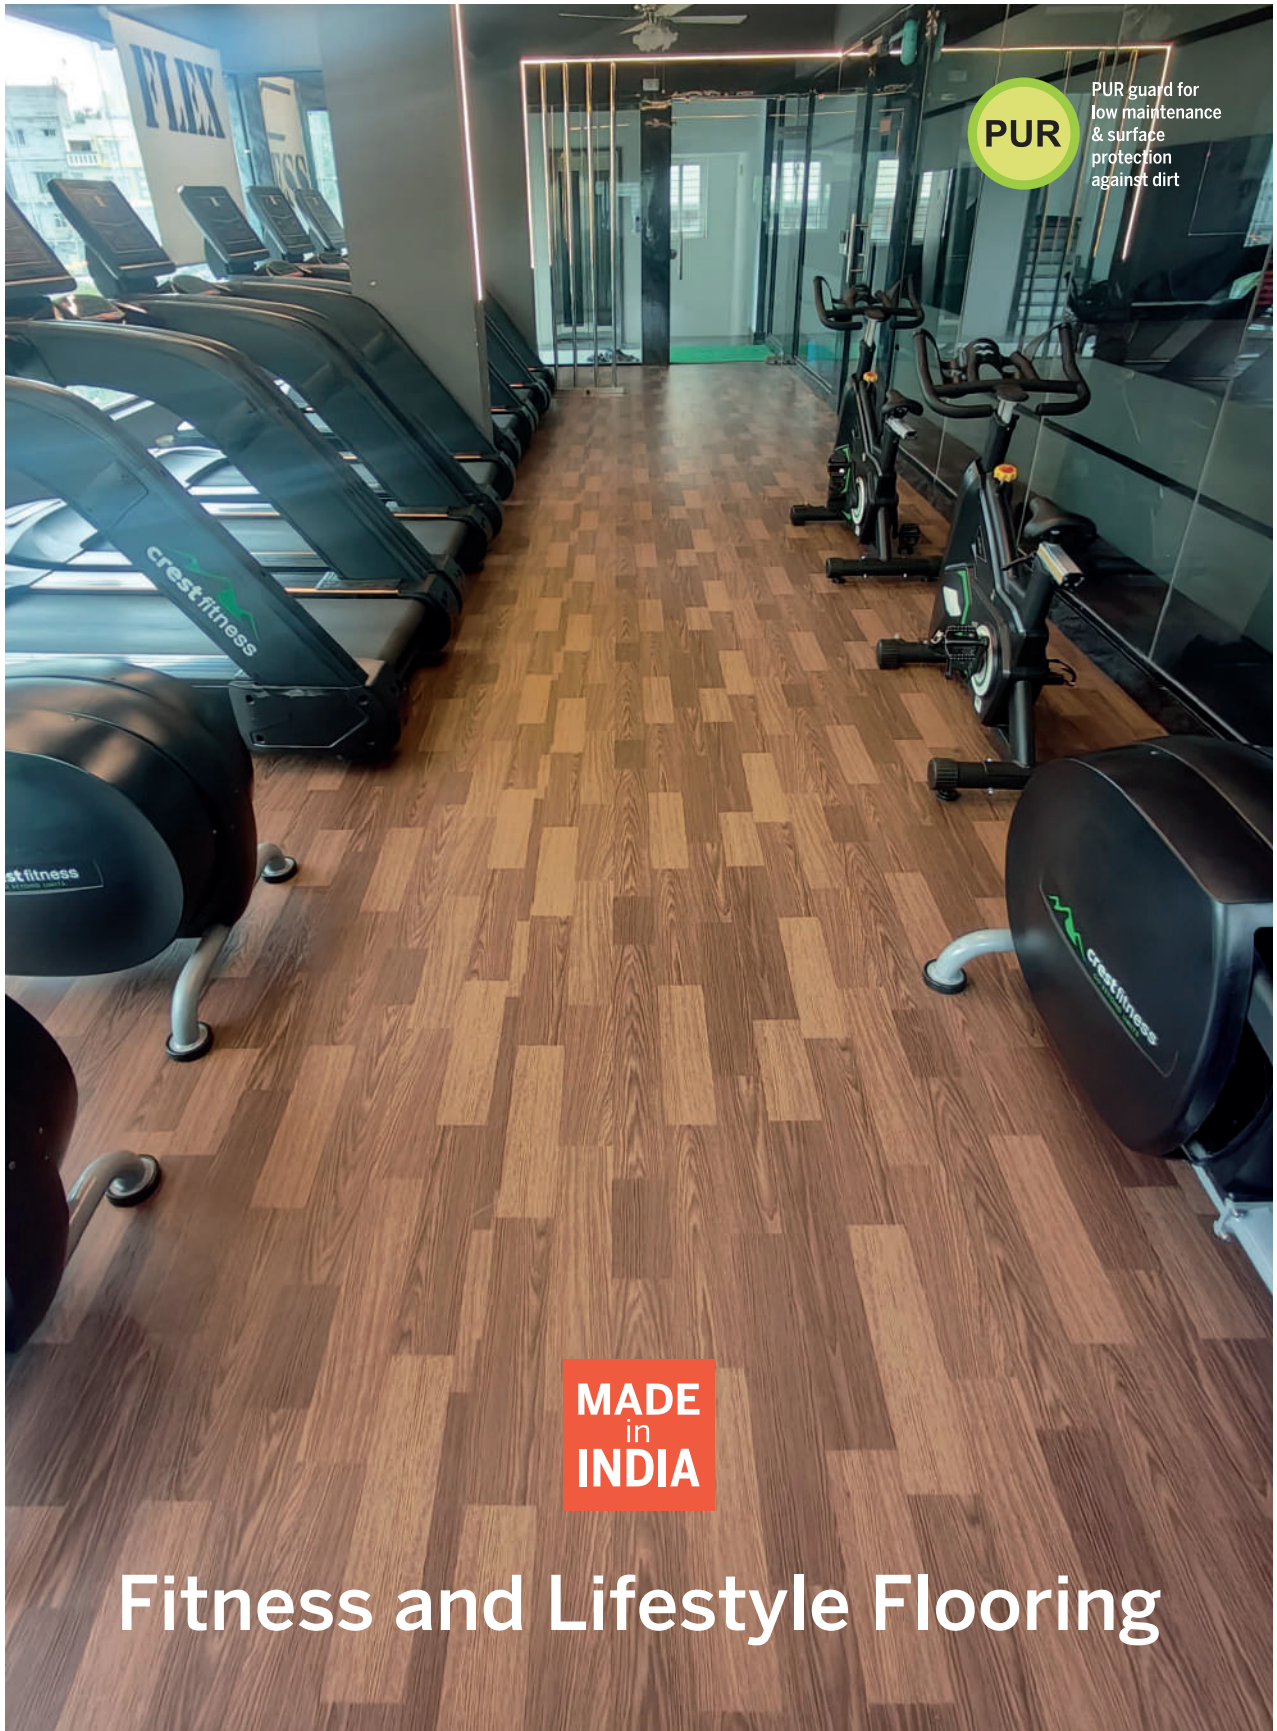

PUR

PUR guard for
low maintenance
& surface
protection
against dirt


**MADE
in
INDIA**

Fitness and Lifestyle Flooring


BRAAVO 4.5mm



AR 051

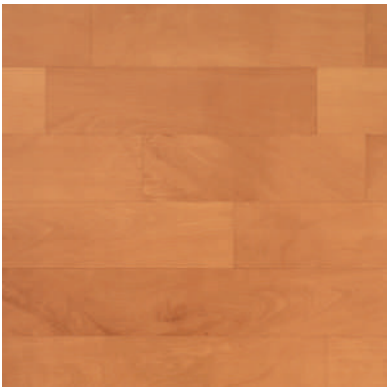

AR 053

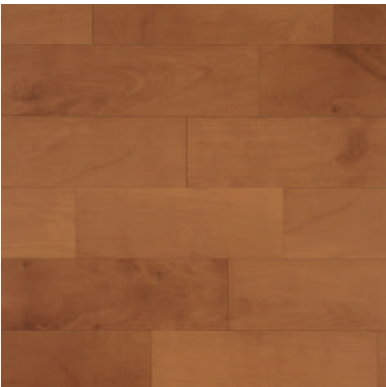

AR 054



AR 055




AR 056



AR 057



ACE, 091, CHERRY RED

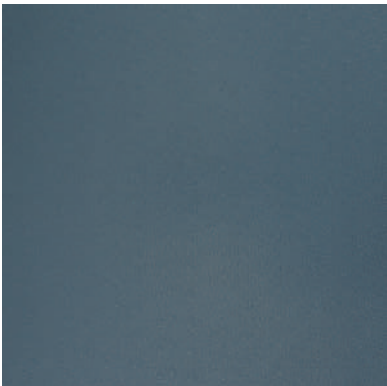

ACE, 092, BLUE



ACE, 093, ORANGE



ACE, 094, GREEN



LIGHT GREY



ACE, 096, YELLOW




ACE, 097, IRON GREY

WONDERFLOOR

www.wonderfloor.co.in

BRAAVO SPORTS 4.5mm

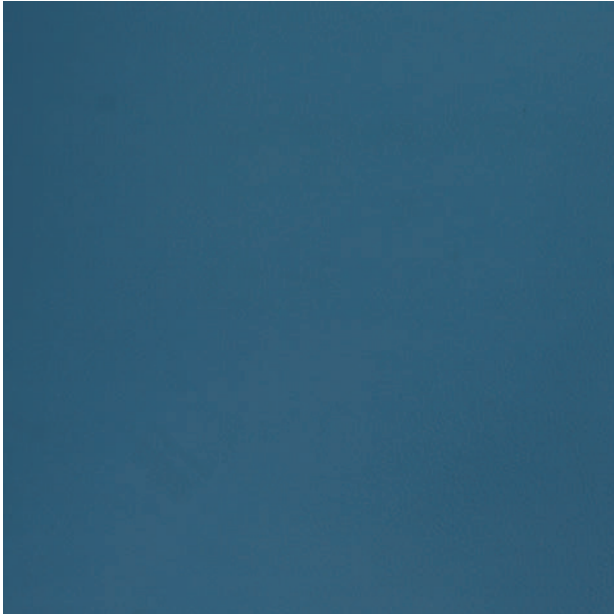

SPT 081 CAPRI BLUE



SPT 082 MEADOWS GREEN



BRAAVO ELITE 6.5mm



ELITE RED 081




ELITE BLUE 082



ELITE ORANGE-083




ELITE GREEN 084

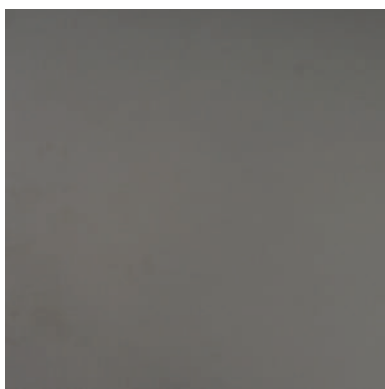

ELITE GRAY 087



ELITE WOOD-085A

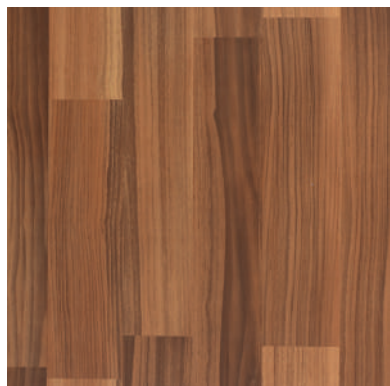


ELITE WOOD 086

Salient Features

- Glass Fiber Tissue (GFT) reinforced for dimensional stability and strength
- PUR surface protection
- Superior shock absorbing cushion base layer
- Specially formulated high abrasion resistant wear layer
- Application areas: Sports Courts, Fitness centres, Schools, Yoga centres, Hospitality, etc.
- Tough and sturdy to withstand heavy traffic and soft enough for a comfortable and jerk free workout

Braavo

Braavo multiple layers for multiple benefits

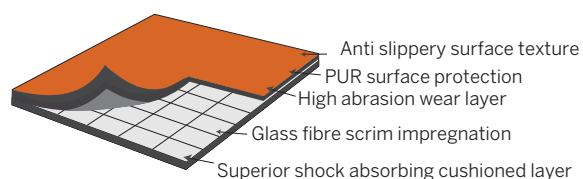





WONDERFLOOR - The world-class vinyl flooring is a quality product from RMG Polyvinyl India Limited, an ISO 9001:2015 systems certified company. We are the largest manufacturer & exporter of PVC floor coverings, film, sheeting and artificial leather. We manufacture a wide range of vinyl flooring in state-of-the art plant & machinery equipped with latest technology and optimum quality control. Wonderfloor has a wide sales distribution network across India.

Braavo is a premium cushioned sports and wellness flooring designed for modern day requirement of a floor that is heavy duty but soft enough for a comfortable and jerk free workout in a gym, sports court or a fitness center. The high strength wear layer takes care of the heavy loads, the 'impregnated Glass Fiber Tissue' reinforcement provides a very high dimensional stability and lay flat properties to the product in any weather conditions. The densely compact cushioned base layer absorbs the jerks and also adds to the acoustical properties of the floor.

PERFORMANCE CHARACTERISTICS

CHARACTERISTICS	TEST METHOD	BRAAVO / BRAAVO SPORTS	BRAAVO ELITE
THICKNESS	EN 428	4.50 MM	6.50 MM
WEAR LAYER	-	0.50 MM	1.00 MM
ROLL DIMENSION	EN 426	2 MTR X 15.00 LINEAR MTR	2 MTR X 15.00 LINEAR MTR
TOTAL WEIGHT	EN 430	3.30 KG/SQ	4.30 KG/SQ
DIMENSIONAL STABILITY	EN 434	≤ 0.10%	≤ 0.10%
RESIDUAL INDENTATION AFTER STATIC LOAD	EN 433	≤ 0.40 MM	≤ 0.40 MM
FLEXIBILITY	EN 435	20 MM MANDREL. PASS	20 MM MANDREL. PASS
ABRASION RESISTANCE	EN: 660-2	WEAR GROUP T	WEAR GROUP T
HORIZONTAL & VERTICAL BURN TEST	IS 15061-2002	PASS (ARAI)	PASS (ARAI)
FIRE PROPAGATION	BS 476 PART 6	(I)=10.8 (II)=1.7 } CLASS "O"	(I)=10.8 (II)=1.7 } CLASS "O"
HYGIENE		TEST RESULTS DEMONSTRATES THAT IT INHIBITS GROWTH OF MICROBES	TEST RESULTS DEMONSTRATES THAT IT INHIBITS GROWTH OF MICROBES
COLOUR FASTNESS TO DAY LIGHT	ISO 105-B02	> BLUE WOOL STANDARD 5	> BLUE WOOL STANDARD 5
SLIP RESISTANCE	DIN 51130	R9	R9
BEARING A CASTOR CHAIR	EN 425	SUITABLE/CONTINUOUS USE	SUITABLE/CONTINUOUS USE
RESISTANCE TO CHEMICALS	EN 423	NO VISIBLE CHANGE	NO VISIBLE CHANGE
SOUND ABSORPTION	ISO 140-8/EN ISO 717-2	Δ LW = 18 DB	Δ LW = 24 DB
PERFORMANCE CLASSIFICATION	EN 685	33,34	33,34
SURFACE PROTECTION	PUR	PUR PROTECTION	PUR PROTECTION



RECOMMENDATION FOR INSTALLATION

Wonderfloor sheet must be allowed to relax for 24 hours in room temperature between 18°C and 27°C prior to installation. Vinyl rolls are suitable for laying on any surface such as concrete, steel wooden floors etc. provided the sub-floor is even, hard and dry. Damp floors should be dried before the commencement of laying. Before installation, the base floor must be thoroughly clean, dry and free from grease & grit. Wonderfloor recommends use of Fevicol SR 998, Fevicol SR 505 or any other equivalent rubber/acrylic/water based adhesive of similar type.

MAINTENANCE

Do's: • After laying of flooring, the surface should be cleaned daily with damp mop and weekly or fortnightly with soap solution • Prevent point load indentation by covering your furniture legs with rubber stopper caps • To remove stubborn stains, rub the affected area immediately with a soft coir brush or fine steel wool soaked in a warm soap solution • Scuff marks on the floor can be removed with little application of diesel • Use door coir or suitable mats to minimize accumulation of dust on Wonderfloor vinyl flooring • Use water to remove any chemical spill on flooring.
Don'ts: • Do not use any strong detergent, harsh cleaning agent or dry steel wool • Throwing of lighted cigarette butts or match sticks on the floor should be avoided as it could lead to burn marks on the floor • Do not drag any heavy object or furniture on the flooring to avoid scratches on the floor.

For institutional/bulk enquiries, please e-mail : mkt@rmgpoly.com
or call : +91 9015313059 (Available between 10am-6:30pm)
For export enquiries, please e-mail : info@rmgpoly.com or call : +91 9873138885

RMG POLYVINYL INDIA LIMITED
WONDERFLOOR is the registered Trade Mark of RMG Polyvinyl India Limited

