

**WONDERFLOOR**

[www.wonderfloor.co.in](http://www.wonderfloor.co.in)

**GDP**



**MADE  
in  
INDIA**

**Home Flooring**

**GDP**



550406



550407



550901



550902



551004



551007



551020



552107



552112



552113



552114



554303



554306



554401



554404



554405



554406



554408



554410



555301



555302



555303



555401



555404




555405



555901



555902

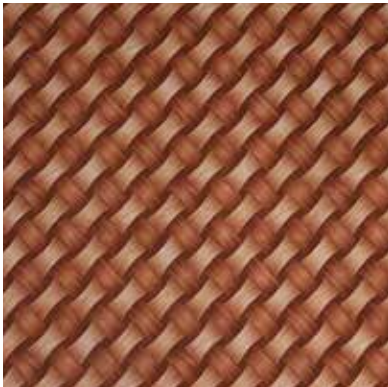

555904



555906



556101



556102




556103



556104



556105

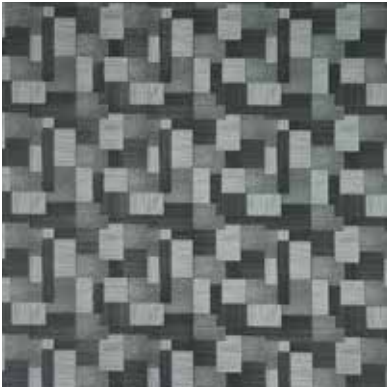

556401



556402



556403



556406



557301



557302



557304



557305



557306



557701



557702



557703



557704




557705




558002



558003

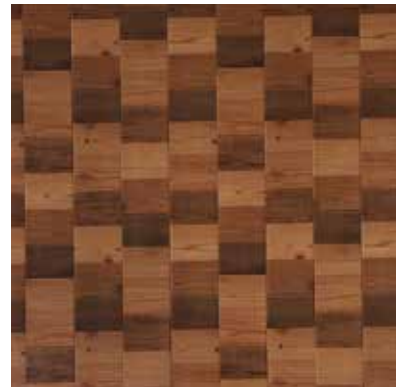

558005

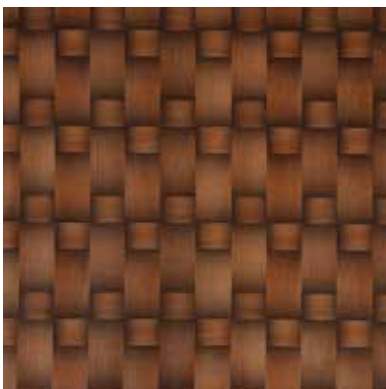

558101



558103



558104



558401



558402



558403



558404



558701



558707



558801



558802



558803



558804



559201



559202



559203



559204



559205



559301



559302



559401



559402



559403



559404



559405

**WONDERFLOOR** - The world-class vinyl flooring is a quality product from RMG Polyvinyl India Limited, an ISO 9001:2015 systems certified company. We are the largest manufacturer & exporter of PVC floor coverings, film, sheeting and artificial leather. We manufacture a wide range of vinyl flooring in state-of-the art plant & machinery equipped with latest technology and optimum quality control. Wonderfloor has a wide sales distribution network across India.

**GDP RANGE** - (Gemini Designer Print) is one of the most popular products among Wonderfloor flooring. The GDP range is a beautiful collection of printed designs and shades capturing select Indian and International trends and styles. The range includes wooden textures, marbles, stones, traditional designs, geometric designs and a lot more. GDP lends every room a lively, refreshing look - be it the living room, the bedroom or the puja room.

PERFORMANCE CHARACTERISTICS

CHARACTERISTICS	GDP
TYPE	ROLL
THICKNESS (mm)	0.65
ROLL WIDTH (mtr)	1.50 and 2.0
ROLL LENGTH (mtr)	30
SURFACE TEXTURE	CLASSIC MAT
PACKAGING; ONE ROLL	60.00 Sqm (2.0 Mts width) 45.00 Sqm (1.5 Mts width)



RECOMMENDATION FOR INSTALLATION

Wonderfloor sheet must be allowed to relax for 24 hours in room temperature between 18°C and 27°C prior to installation. Vinyl rolls are suitable for laying on any surface such as concrete, steel wooden floors etc. provided the sub-floor is even, hard and dry. Damp floors should be dried before the commencement of laying. Before installation, the base floor must be thoroughly clean, dry and free from grease & grit. Wonderfloor recommends use of Fevicol SR 998, Fevicol SR 505 or any other equivalent rubber/acrylic/water based adhesive of similar type.

MAINTENANCE

Do's: • After laying of flooring, the surface should be cleaned daily with damp mop and weekly or fortnightly with soap solution • Prevent point load indentation by covering your furniture legs with rubber stopper caps • To remove stubborn stains, rub the affected area immediately with a soft coir brush or fine steel wool soaked in a warm soap solution • Scuff marks on the floor can be removed with little application of diesel • Use door coir or suitable mats to minimize accumulation of dust on Wonderfloor vinyl flooring • Use water to remove any chemical spill on flooring.

Don'ts: • Do not use any strong detergent, harsh cleaning agent or dry steel wool • Throwing of lighted cigarette butts or match sticks on the floor should be avoided as it could lead to burn marks on the floor • Do not drag any heavy object or furniture on the flooring to avoid scratches on the floor.

For institutional/bulk enquiries, please e-mail : [mkt@rmgpoly.com](mailto:mkt@rmgpoly.com)  
or call : +91 9015313059 (Available between 10am-6:30pm)  
For export enquiries, please e-mail : [info@rmgpoly.com](mailto:info@rmgpoly.com) or call : +91 9873138885

**RMG POLYVINYL INDIA LIMITED**  
WONDERFLOOR is the registered Trade Mark of RMG Polyvinyl India Limited

