

WONDERFLOOR

www.wonderfloor.co.in

GALAXXY



**MADE
in
INDIA**

Home Flooring

GALAXXY



114003



114004



210402



210404



210405



210601



210603



210604



210608



212801



212802



212803

GALAXXY



212804



213001



213003



213004



213005



213006



213701



213702




213704



213706



213707

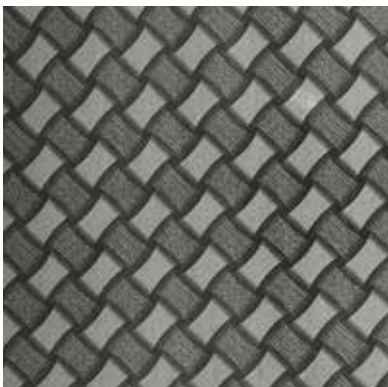

213901

GALAXXY



213904



213905



216201



216205



216604



216606



216608



218701



218703



218704



218705



218706

GALAXXY



218707



219201



219203



219205




311301




311302




311304

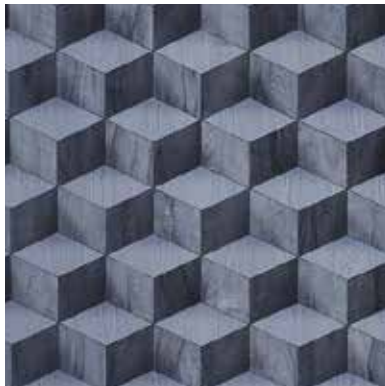


311501

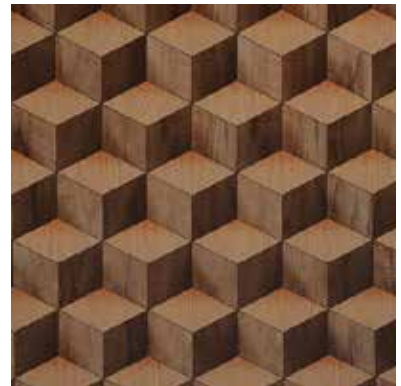


311502

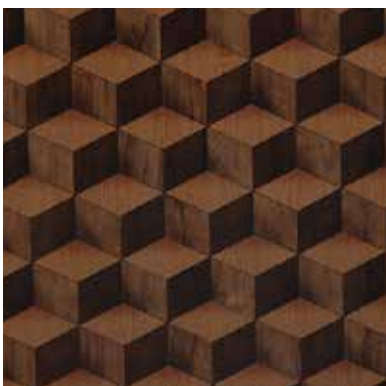

311504

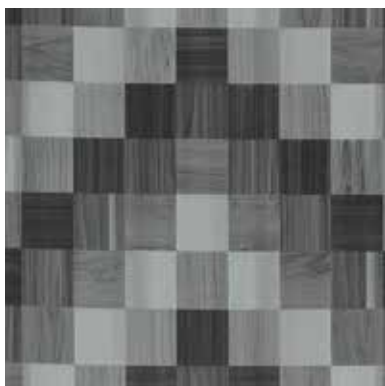

311801

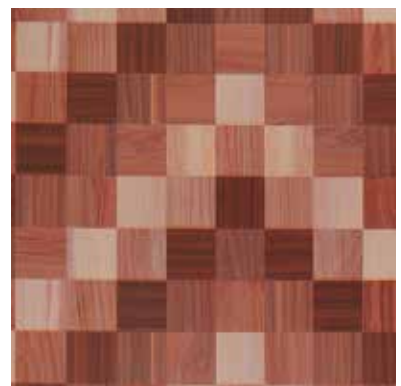

311803

GALAXXY




311804




311806



312201

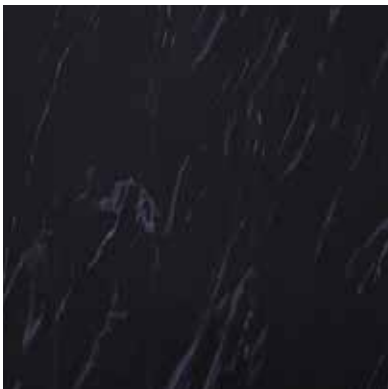

312202

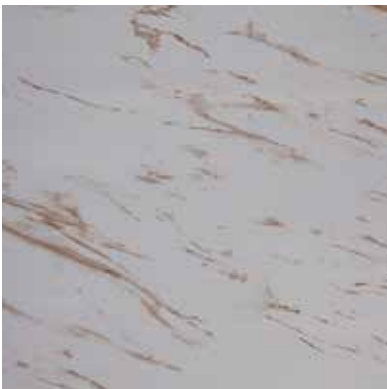

312203



312301




312302



312303



312304

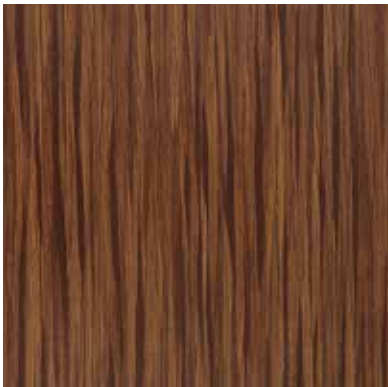

312305



312501



312502

GALAXXY



312503



312504



312505



312601



312602



312603



312604



312605



313301



313302



313303



313304

GALAXXY



313501



313502



313503



313504



313505



313701



313702



313703



313704



552601



552605



552606


WONDERFLOOR®

www.wonderfloor.co.in

GALAXXY



PURE BLACK



PURE WHITE

WONDERFLOOR - The world-class vinyl flooring is a quality product from RMG Polyvinyl India Limited, an ISO 9001:2015 systems certified company. We are the largest manufacturer & exporter of PVC floor coverings, film, sheeting and artificial leather. We manufacture a wide range of vinyl flooring in state-of-the art plant & machinery equipped with latest technology and optimum quality control. Wonderfloor has a wide sales distribution network across India.

GALAXXY is a classic collection of wood and stone design printed flooring. This range is ideal for home flooring but can also be installed in small office or small shops where footfalls are light duty. It is available in a wide range of Geometrical, Flower, Wooden and Stone designs.

PERFORMANCE CHARACTERISTICS

CHARACTERISTICS	GALAXXY
TYPE	ROLL
THICKNESS (mm)	0.50
ROLL WIDTH (mtr)	1.50 and 2.00
ROLL LENGTH (mtr)	Upto 35



RECOMMENDATION FOR INSTALLATION

Wonderfloor sheet must be allowed to relax for 24 hours in room temperature between 18°C and 27°C prior to installation. Vinyl rolls are suitable for laying on any surface such as concrete, steel wooden floors etc. provided the sub-floor is even, hard and dry. Damp floors should be dried before the commencement of laying. Before installation, the base floor must be thoroughly clean, dry and free from grease & grit. Wonderfloor recommends use of Fevicol SR 998, Fevicol SR 505 or any other equivalent rubber/acrylic/water based adhesive of similar type.

MAINTENANCE

Do's: • After laying of flooring, the surface should be cleaned daily with damp mop and weekly or fortnightly with soap solution • Prevent point load indentation by covering your furniture legs with rubber stopper caps • To remove stubborn stains, rub the affected area immediately with a soft coir brush or fine steel wool soaked in a warm soap solution • Scuff marks on the floor can be removed with little application of diesel • Use door coir or suitable mats to minimize accumulation of dust on Wonderfloor vinyl flooring • Use water to remove any chemical spill on flooring.
Don'ts: • Do not use any strong detergent, harsh cleaning agent or dry steel wool • Throwing of lighted cigarette butts or match sticks on the floor should be avoided as it could lead to burn marks on the floor • Do not drag any heavy object or furniture on the flooring to avoid scratches on the floor.

For institutional/bulk enquiries, please e-mail : mkt@rmgpoly.com
or call : +91 9015313059 (Available between 10am-6:30pm)
For export enquiries, please e-mail : info@rmgpoly.com or call : +91 9873138885

RMG POLYVINYL INDIA LIMITED
WONDERFLOOR is the registered Trade Mark of RMG Polyvinyl India Limited

