

WONDERFLOOR

www.wonderfloor.co.in

KRAYONS

**PRIME
SERIES**

PUR

Protection

PUR guard for
low maintenance &
surface protection
against dirt

**MADE
in
INDIA**

School Flooring

Krayons installed at Excellence Educational Academy - Varanasi

WONDERFLOOR

www.wonderfloor.co.in


KRAYONS



Pastel Pink



Pastel Orange

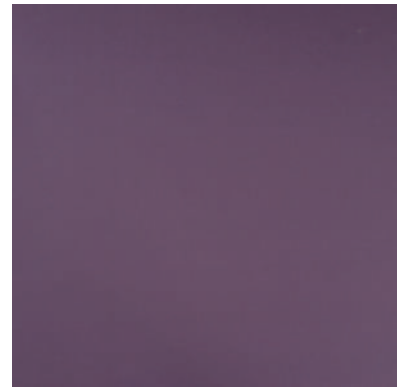

Pastel Purple



Pastel Cherry



Pastel Blue



Fluorescent



Pastel Green



Pastel Lemon



ORCHIDS The International School - Bangalore



Raichandani Mall Play Zone, Hyderabad



Saifee High School - Mumbai

WONDERFLOOR

www.wonderfloor.co.in

KRAYONS



Frosty Orange



Frosty Red



Frosty Yellow



Frosty Blue



Frosty Grey



Frosty Beige



Doon International School - Chandigarh

WONDERFLOOR - The world-class vinyl flooring is a quality product from RMG Polyvinyl India Limited, an ISO 9001:2015 systems certified company. We are the largest manufacturer & exporter of PVC floor coverings, film, sheeting and artificial leather. We manufacture a wide range of vinyl flooring in state-of-the art plant & machinery equipped with latest technology and optimum quality control. Wonderfloor has a wide sales distribution network across India.

Krayons is designers delight and a medium to get imaginative and creative by a mix-and-match of different shapes, sizes and colours. Application Areas - It is ideal for schools, educational institutions, playgroup areas, activity areas, children rooms in homes etc.

PERFORMANCE CHARACTERISTICS

| CHARACTERISTICS | TEST METHOD | KRAYONS |
|----------------------------|------------------------|--------------------------------------|
| THICKNESS (MM) | EN 428 / ISO 24346 | 2.00 |
| ROLL WIDTH (MTR) | EN 426 / ISO 24341 | 2.00 |
| ROLL LENGTH (MTR) | EN 426 / ISO 24341 | 20 |
| TOTAL WEIGHT (KGS/SQ MTR) | EN 430 / ISO 23997 | 1.8 |
| SURFACE PROTECTION | PUR | PUR PROTECTION |
| SLIP RESISTANCE | DIN 51130 / ASTM D2047 | R9 |
| HYGIENE / CLEAN ROOM TEST | ISO 14644-1 | INHIBITS GROWTH OF MICROBES, CLASS A |
| RESIDUAL INDENTATION (MM) | EN 433 / ISO 23343-1 | ≤ 0.12 MM |
| FLEXIBILITY (mm) | EN 435 / ISO 24344 | 20 mm MANDREL. PASS |
| DIMENSIONAL STABILITY (%) | EN 434 / ISO 23999 | ≤ 0.10% |
| BEARING CASTOR CHAIR | EN 425 / ISO 4918 | SUITABLE / CONTINUOUS |
| RESISTANCE TO CHEMICALS | ASTM F925 | NO VISIBLE CHANGE - PASS |
| REACTION TO FIRE (kw/m2) | EN ISO 9239-1 | Cfl-S1 |
| PERFORMANCE CLASSIFICATION | EN 685 / ISO 10874 | 33, 43 |
| ABRASION RESISTANCE | EN: 660-2 | WEAR GROUP P |
| SOUND ABSORPTION | ISO 140-8/EN ISO 717-2 | Δ LW = 14db |
| THERMAL RESISTANCE (m2k/w) | EN 12664 / ISO 8302 | <0.00568 - PASS |
| STAIN RESISTANCE | EN 423 / ISO 26987 | 0, EXCELLENT RESISTANCE |
| COLOUR FASTNESS | ISO 105-B02 | > BLUE WOOL STANDARD 5 |
| MARITIME USAGES | | SUITABLE |



RECOMMENDATION FOR INSTALLATION

Wonderfloor sheet must be allowed to relax for 24 hours in room temperature between 18°C and 27°C prior to installation. Vinyl rolls are suitable for laying on any surface such as concrete, steel wooden floors etc. provided the sub-floor is even, hard and dry. Damp floors should be dried before the commencement of laying. Before installation, the base floor must be thoroughly clean, dry and free from grease & grit. Wonderfloor recommends use of Fecivol SR 998, Fecivol SR 505 or any other equivalent rubber/acrylic/water based adhesive of similar type.

MAINTENANCE

Do's: • After laying of flooring, the surface should be cleaned daily with damp mop and weekly or fortnightly with soap solution • Prevent point load indentation by covering your furniture legs with rubber stopper caps • To remove stubborn stains, rub the affected area immediately with a soft coir brush or fine steel wool soaked in a warm soap solution • Scuff marks on the floor can be removed with little application of diesel • Use door coir or suitable mats to minimize accumulation of dust on Wonderfloor vinyl flooring • Use water to remove any chemical spill on flooring.

Don'ts: • Do not use any strong detergent, harsh cleaning agent or dry steel wool • Throwing of lighted cigarette butts or match sticks on the floor should be avoided as it could lead to burn marks on the floor • Do not drag any heavy object or furniture on the flooring to avoid scratches on the floor.

For institutional/bulk enquiries, please e-mail : mkt@rmgpoly.com or call : +91 9711200510

For export enquiries, please e-mail : info@rmgpoly.com or call : +91 9873138885

RMG POLYVINYL INDIA LIMITED

WONDERFLOOR is the registered Trade Mark of RMG Polyvinyl India Limited

