

**WONDERFLOOR**

[www.wonderfloor.co.in](http://www.wonderfloor.co.in)

**LUXURIA**



**MADE  
in  
INDIA**

**Cushion Vinyl Flooring**

**WONDERFLOOR**

[www.wonderfloor.co.in](http://www.wonderfloor.co.in)

# LUXURIA



771701



771702



771703



771704



775103



775105



775106



775107



775402



775403



775404




775405

**WONDERFLOOR**

[www.wonderfloor.co.in](http://www.wonderfloor.co.in)


**LUXURIA**

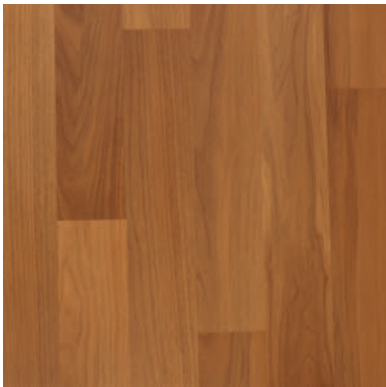

776125



776126

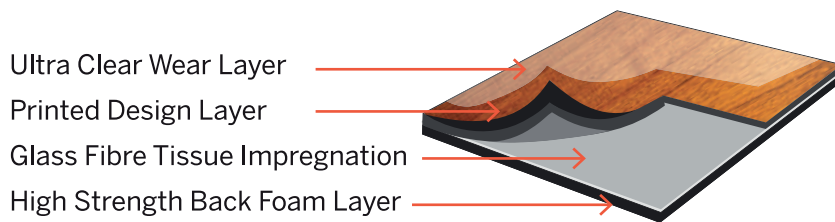

- Residential / Semi commercial application
- Relaxed and comfort foot
- Sound absorption
- Ideal for cold climate (remain soft)
- Good dimensional stability
- Cosy and warm Interior.



**WONDERFLOOR** - The world-class vinyl flooring is a quality product from RMG Polyvinyl India Limited, an ISO 9001:2015 systems certified company. We are the largest manufacturer & exporter of PVC floor coverings, film, sheeting and artificial leather. We manufacture a wide range of vinyl flooring in state-of-the art plant & machinery equipped with latest technology and optimum quality control. Wonderfloor has a wide sales distribution network across India.

**LUXURIA** is a superbly crafted premium range of residential flooring equipped with glass fibre tissue impregnation and a cushion base for extreme comfort while walking barefoot in homes. These floorings are recommended for use in residential homes and are user friendly in cold weather conditions.

## PERFORMANCE CHARACTERISTICS

CHARACTERISTICS	TEST METHOD	LUXURIA (Cushion Vinyl Flooring)
THICKNESS (mm)	EN 428 / ISO 24346	2.00
ROLL WIDTH (mtr)	EN 426 / ISO 24341	2.00
ROLL LENGTH (mtr)	EN 426 / ISO 24341	25
TOTAL WEIGHT (kgs/sq mtr)	EN 430 / ISO 23997	1.65
SLIP RESISTANCE	DIN 51130 / ASTM D2047	R9
HYGIENE / CLEAN ROOM TEST	ISO 14644-1	INHIBITS GROWTH OF MICROBES, CLASS A
RESIDUAL INDENTATION (mm)	EN 433 / ISO 23343-1	≤ 0.40mm
FLEXIBILITY (mm)	EN 435 / ISO 24344	20 mm MANDREL. PASS
DIMENSIONAL STABILITY (%)	EN 434 / ISO 23999	≤ 0.10%
BEARING CASTOR CHAIR	EN 425 / ISO 4918	SUITABLE / CONTINUOUS
ELECTRICAL RESISTANCE	EN 1081	ANTISTATIC
RESISTANCE TO CHEMICALS	ASTM F925	NO VISIBLE CHANGE - PASS
REACTION TO FIRE (kw/m2)	EN ISO 9239-1	Cfl-S1
PERFORMANCE CLASSIFICATION	EN 685 / ISO 10874	31
ABRASION RESISTANCE	EN: 660-2	WEAR GROUP M
SOUND ABSORPTION	ISO 140-8/EN ISO 717-2	Δ LW = 14db
STAIN RESISTANCE	EN 423 / ISO 26987	1, Very Good Resistance
COLOUR FASTNESS	ISO 105-B02	> BLUE WOOL STANDARD 5
MARITIME USAGES		SUITABLE



### RECOMMENDATION FOR INSTALLATION

Wonderfloor sheet must be allowed to relax for 24 hours in room temperature between 18°C and 27°C prior to installation. Vinyl rolls are suitable for laying on any surface such as concrete, steel wooden floors etc. Provided the sub-floor is even, hard and dry. Damp floors should be dried before the commencement of laying. Before installation, the base floor must be thoroughly clean, dry and free from grease & grit. Wonderfloor recommends use of Fevicol SR 998, Fevicol SR 505 or any other equivalent rubber/acrylic/water based adhesive of similar type.

### MAINTENANCE

Do's: • After laying of flooring, the surface should be cleaned daily with damp mop and weekly or fortnightly with soap solution • Prevent point load indentation by covering your furniture legs with rubber stopper caps • To remove stubborn stains, rub the affected area immediately with a soft coir brush or fine steel wool soaked in a warm soap solution • Scuff marks on the floor can be removed with little application of diesel • Use door coir or suitable mats to minimize accumulation of dust on Wonderfloor vinyl flooring • Use water to remove any chemical spill on flooring.

Don'ts: • Do not use any strong detergent, harsh cleaning agent or dry steel wool • Throwing of lighted cigarette butts or match sticks on the floor should be avoided as it could lead to burn marks on the floor • Do not drag any heavy object or furniture on the flooring to avoid scratches on the floor.

For institutional/bulk enquiries, please e-mail : [mkt@rmgpoly.com](mailto:mkt@rmgpoly.com)

or call : +91 9711200510

For export enquiries, please e-mail : [info@rmgpoly.com](mailto:info@rmgpoly.com)

or call : +91 9873138885 / +91 9953208740

## RMG POLYVINYL INDIA LIMITED

WONDERFLOOR is the registered Trade Mark of RMG Polyvinyl India Limited

