

**WONDERFLOOR**

[www.wonderfloor.co.in](http://www.wonderfloor.co.in)

**ORNATE**

**PUR**



**MADE  
in  
INDIA**

**Premium Compact Flooring**

**WONDERFLOOR**

[www.wonderfloor.co.in](http://www.wonderfloor.co.in)

# ORNATE



551101



551102



551103



551104



551105



551201



551203



551204



551205



551206



551207



551601

**WONDERFLOOR**

[www.wonderfloor.co.in](http://www.wonderfloor.co.in)

# ORNATE



551602



551603



551604



551605



552911



552912



552913




557801



557802



557803

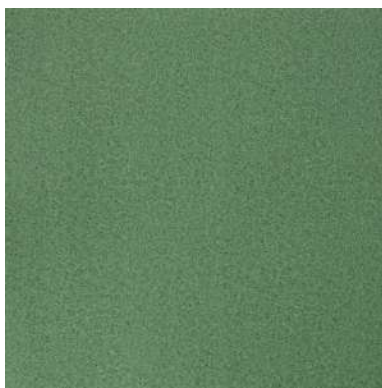

557804



557805

**WONDERFLOOR** - The world-class vinyl flooring is a quality product from RMG Polyvinyl India Limited, an ISO 9001:2015 systems certified company. We are the largest manufacturer & exporter of PVC floor coverings, film, sheeting and artificial leather. We manufacture a wide range of vinyl flooring in state-of-the art plant & machinery equipped with latest technology and optimum quality control. Wonderfloor has a wide sales distribution network across India.

## PERFORMANCE CHARACTERISTICS

CHARACTERISTICS	TEST METHOD	ORNATE (Premium Compact Flooring)
THICKNESS (mm)	EN 428 / ISO 24346	1.60 / 2.00*
ROLL WIDTH (mtr)	EN 426 / ISO 24341	2.00
ROLL LENGTH (mtr)	EN 426 / ISO 24341	20
TILE SIZE (mm)	EN 427	NA
TOTAL WEIGHT (kgs/sq mtr)	EN 430 / ISO 23997	2.35 / 3.05
SURFACE PROTECTION	PUR	PUR PROTECTION
SLIP RESISTANCE	DIN 51130 / ASTM D2047	R9
HYGIENE / CLEAN ROOM TEST	ISO 14644-1	Inhibits Growth of Microbes, Class A
RESIDUAL INDENTATION (mm)	EN 433 / ISO 23343-1	≤ 0.40mm
FLEXIBILITY (mm)	EN 435 / ISO 24344	20 mm MANDREL. PASS
DIMENSIONAL STABILITY (%)	EN 434 / ISO 23999	≤ 0.10%
BEARING CASTOR CHAIR	EN 425 / ISO 4918	SUITABLE / CONTINUOUS
Electrical Resistance (Ω)	EN 1081	Antistatic
Resistance to chemicals	ASTM F925	No visible change - Pass
REACTION TO FIRE (kw/m <sup>2</sup> )	EN ISO 9239-1	Cfl-S1
PERFORMANCE CLASSIFICATION	EN 685 / ISO 10874	32, 34
ABRASION RESISTANCE	EN: 660-2	WEAR GROUP M
SOUND ABSORPTION	ISO 140-8/EN ISO 717-2	Δ LW = 5db
THERMAL RESISTANCE (m <sup>2</sup> k/w)	EN 12664 / ISO 8302	<0.00568 - PASS
STAIN RESISTANCE	EN 423 / ISO 26987	0, EXCELLENT RESISTANCE
COLOUR FASTNESS	ISO 105-B02	> BLUE WOOL STANDARD 5
MARITIME USAGES		SUITABLE

\*Can be produced on bulk order



### RECOMMENDATION FOR INSTALLATION

Wonderfloor sheet must be allowed to relax for 24 hours in room temperature between 18°C and 27°C prior to installation. Vinyl rolls are suitable for laying on any surface such as concrete, steel wooden floors etc. provided the sub-floor is even, hard and dry. Damp floors should be dried before the commencement of laying. Before installation, the base floor must be thoroughly clean, dry and free from grease & grit. Wonderfloor recommends use of Fevicol SR 998, Fevicol SR 505 or any other equivalent rubber/acrylic/water based adhesive of similar type.

### MAINTENANCE

**Do's:** • After laying of flooring, the surface should be cleaned daily with damp mop and weekly or fortnightly with soap solution • Prevent point load indentation by covering your furniture legs with rubber stopper caps • To remove stubborn stains, rub the affected area immediately with a soft coir brush or fine steel wool soaked in a warm soap solution • Scuff marks on the floor can be removed with little application of diesel • Use door coir or suitable mats to minimize accumulation of dust on Wonderfloor vinyl flooring • Use water to remove any chemical spill on flooring.

**Don'ts:** • Do not use any strong detergent, harsh cleaning agent or dry steel wool • Throwing of lighted cigarette butts or match sticks on the floor should be avoided as it could lead to burn marks on the floor • Do not drag any heavy object or furniture on the flooring to avoid scratches on the floor.

For institutional/bulk enquiries, please e-mail : [mkt@rmgpoly.com](mailto:mkt@rmgpoly.com)

or call : +91 9711200510

For export enquiries, please e-mail : [info@rmgpoly.com](mailto:info@rmgpoly.com)

or call : +91 9873138885 / +91 9953208740

## RMG POLYVINYL INDIA LIMITED

WONDERFLOOR is the registered Trade Mark of RMG Polyvinyl India Limited

