

**WONDERFLOOR**

[www.wonderfloor.co.in](http://www.wonderfloor.co.in)

**SAFETY**




**MADE  
in  
INDIA**

**Anti-Skid Transport Flooring**


# SAFETY




SHATABDI BLUE

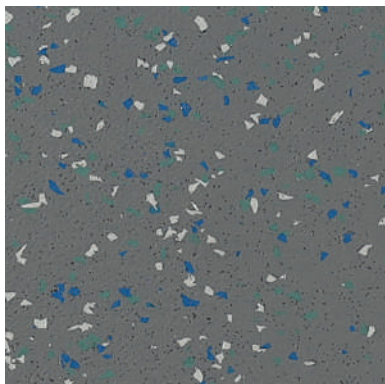


EC GREY

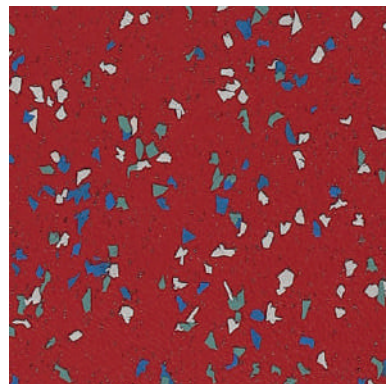


CRIMSON RED

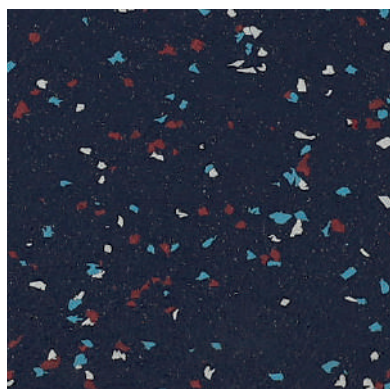


N.BLUE

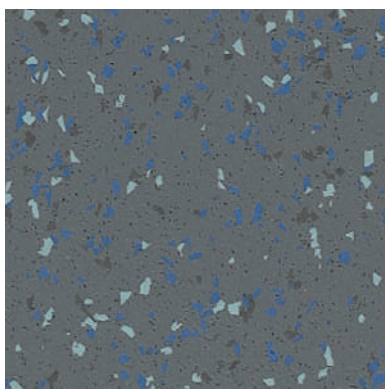


KL GREY

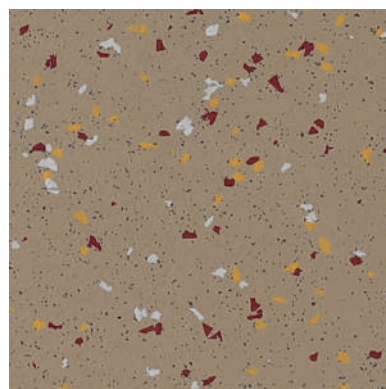


SR BEIGE

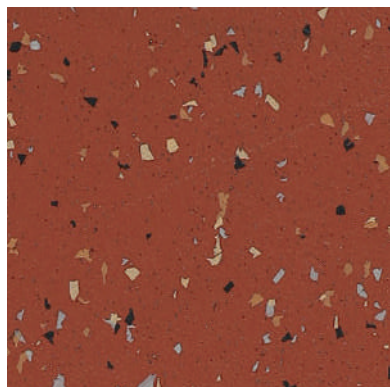


TERRACOTTA

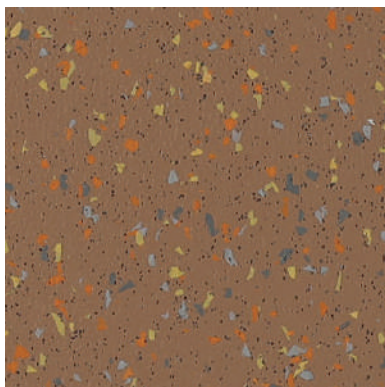

SANDY BROWN

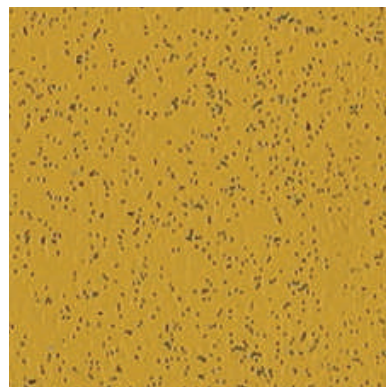


SPARKLE YELLOW

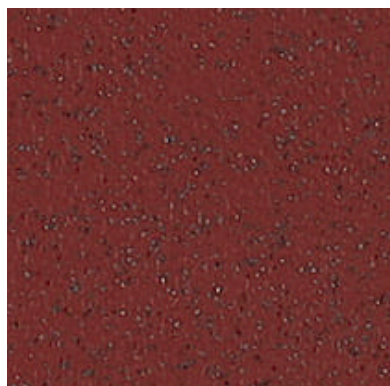

SPARKLE RED



SPARKLE GREY

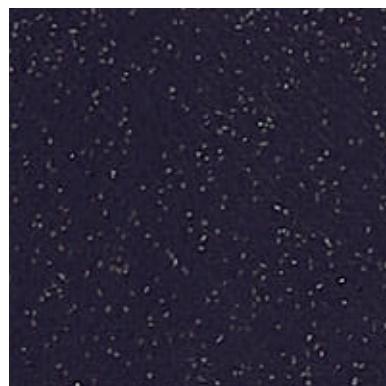

SPARKLE BLUE

**WONDERFLOOR** - The world-class vinyl flooring is a quality product from RMG Polyvinyl India Limited, an ISO 9001:2015 systems certified company. We are the largest manufacturer & exporter of PVC floor coverings, film, sheeting and artificial leather. We manufacture a wide range of vinyl flooring in state-of-the art plant & machinery equipped with latest technology and optimum quality control. Wonderfloor has a wide sales distribution network across India.

**SAFETY** are special floor coverings embedded with Silicon Carbide (Corundum) grains on the top surface which provide a very high slip resistance rating. Due to a superior PVC content and Silicon Carbide Grains, these floorings can withstand very high abrasion and are most suitable for areas where there is heavy footfall & anti-slip properties are required like: Buses, Trains, Ramps, Wet Areas, etc. These floorings are also produced with special additives to meet stringent Fire & Smoke properties prevalent for use in Buses & Railway coaches.

## PERFORMANCE CHARACTERISTICS

CHARACTERISTICS	TEST METHOD	SAFETY
THICKNESS (mm)	EN 428	1.50 / 2.00 / 3.00
TOTAL WEIGHT (kgs/sq mtr)	EN 430	2.75 / 3.75 / 5.56
ROLL WIDTH (mtr)	EN 426	1.50 / 2.00
ROLL LENGTH (mtr)	EN 426	15 / 20
RESIDUAL INDENTATION (mm) AFTER STATIC LOAD	EN 433	≤ 0.10mm
DIMENSIONAL STABILITY (%)	EN 434	0.40 (MAX)
MOISTURE MOVEMENT (%)	IS 3462	0.40 (MAX)
FLEXIBILITY AT 0°/1HR 40mm MANDREL	EN 435	SHALL NOT BREAK, CRACK OR SHOW ANY OTHER SIGN OF FAILURE
ABRASION RESISTANCE	EN: 660-2 / EN 469	WEAR GROUP T
SLIP RESISTANCE	DIN 51130	R 11
SOUND ABSORPTION	ISO 140-8/EN ISO 717-2	Δ LW = 5db
BEARING CASTOR CHAIR	EN 425	SUITABLE / CONTINUOUS USE
FLAMMABILITY HORIZONTAL / VERTICAL	IS 15061 (ARAI)	100mm / MINUTE
COLOUR FASTNESS	ISO 105-B02/IS 9766 ISO 877-76	> BLUE WOOL STANDARD 5
RESISTANCE TO CHEMICAL	EN 423	NO VISIBLE CHANGE
PERFORMANCE CLASSIFICATION	EN 685 / ISO 10874	34, 43



### RECOMMENDATION FOR INSTALLATION

Wonderfloor sheet must be allowed to relax for 24 hours in room temperature between 18°C and 27°C prior to installation. Vinyl rolls are suitable for laying on any surface such as concrete, steel wooden floors etc. provided the sub-floor is even, hard and dry. Damp floors should be dried before the commencement of laying. Before installation, the base floor must be thoroughly clean, dry and free from grease & grit. Wonderfloor recommends use of Fevicol SR 998, Fevicol SR 505 or any other equivalent rubber/acrylic/water based adhesive of similar type.

### MAINTENANCE

**Do's:** • After laying of flooring, the surface should be cleaned daily with damp mop and weekly or fortnightly with soap solution • Prevent point load indentation by covering your furniture legs with rubber stopper caps • To remove stubborn stains, rub the affected area immediately with a soft coir brush or fine steel wool soaked in a warm soap solution • Scuff marks on the floor can be removed with little application of diesel • Use door coir or suitable mats to minimize accumulation of dust on Wonderfloor vinyl flooring • Use water to remove any chemical spill on flooring.

**Don'ts:** • Do not use any strong detergent, harsh cleaning agent or dry steel wool • Throwing of lighted cigarette butts or match sticks on the floor should be avoided as it could lead to burn marks on the floor • Do not drag any heavy object or furniture on the flooring to avoid scratches on the floor.

For institutional/bulk enquiries, please e-mail : [mkt@rmgpoly.com](mailto:mkt@rmgpoly.com)

or call : +91 9711200510

For export enquiries, please e-mail : [info@rmgpoly.com](mailto:info@rmgpoly.com)

or call : +91 9873138885 / +91 9953208740

## RMG POLYVINYL INDIA LIMITED

WONDERFLOOR is the registered Trade Mark of RMG Polyvinyl India Limited

