

TIMBERWORLD

1.50 mm



**MADE
in
INDIA**

**REAL
LVT**
HOT PRESS
TECHNOLOGY

**High Performance
Luxury Vinyl Planks**



Fire
Resistant



Termite
Proof



Environment
Friendly



Moisture
Proof



PUR guard for
low maintenance
& surface
protection
against dirt

Image is for illustration purposes only, actual shade may vary in shade and appearance

TIMBERWORLD

1.50 mm



914.4mm (36 inch)

Dimensions



152.4mm (6 inch)

A2

TIMBERWORLD

1.50 mm



914.4mm (36 inch)

Dimensions



152.4mm (6 inch)

A4

TIMBERWORLD

1.50 mm



914.4mm (36 inch)

Dimensions



152.4mm (6 inch)

A7

TIMBERWORLD
1.50 mm



914.4mm (36 inch)


Dimensions



152.4mm (6 inch)

B1

TIMBERWORLD
1.50 mm

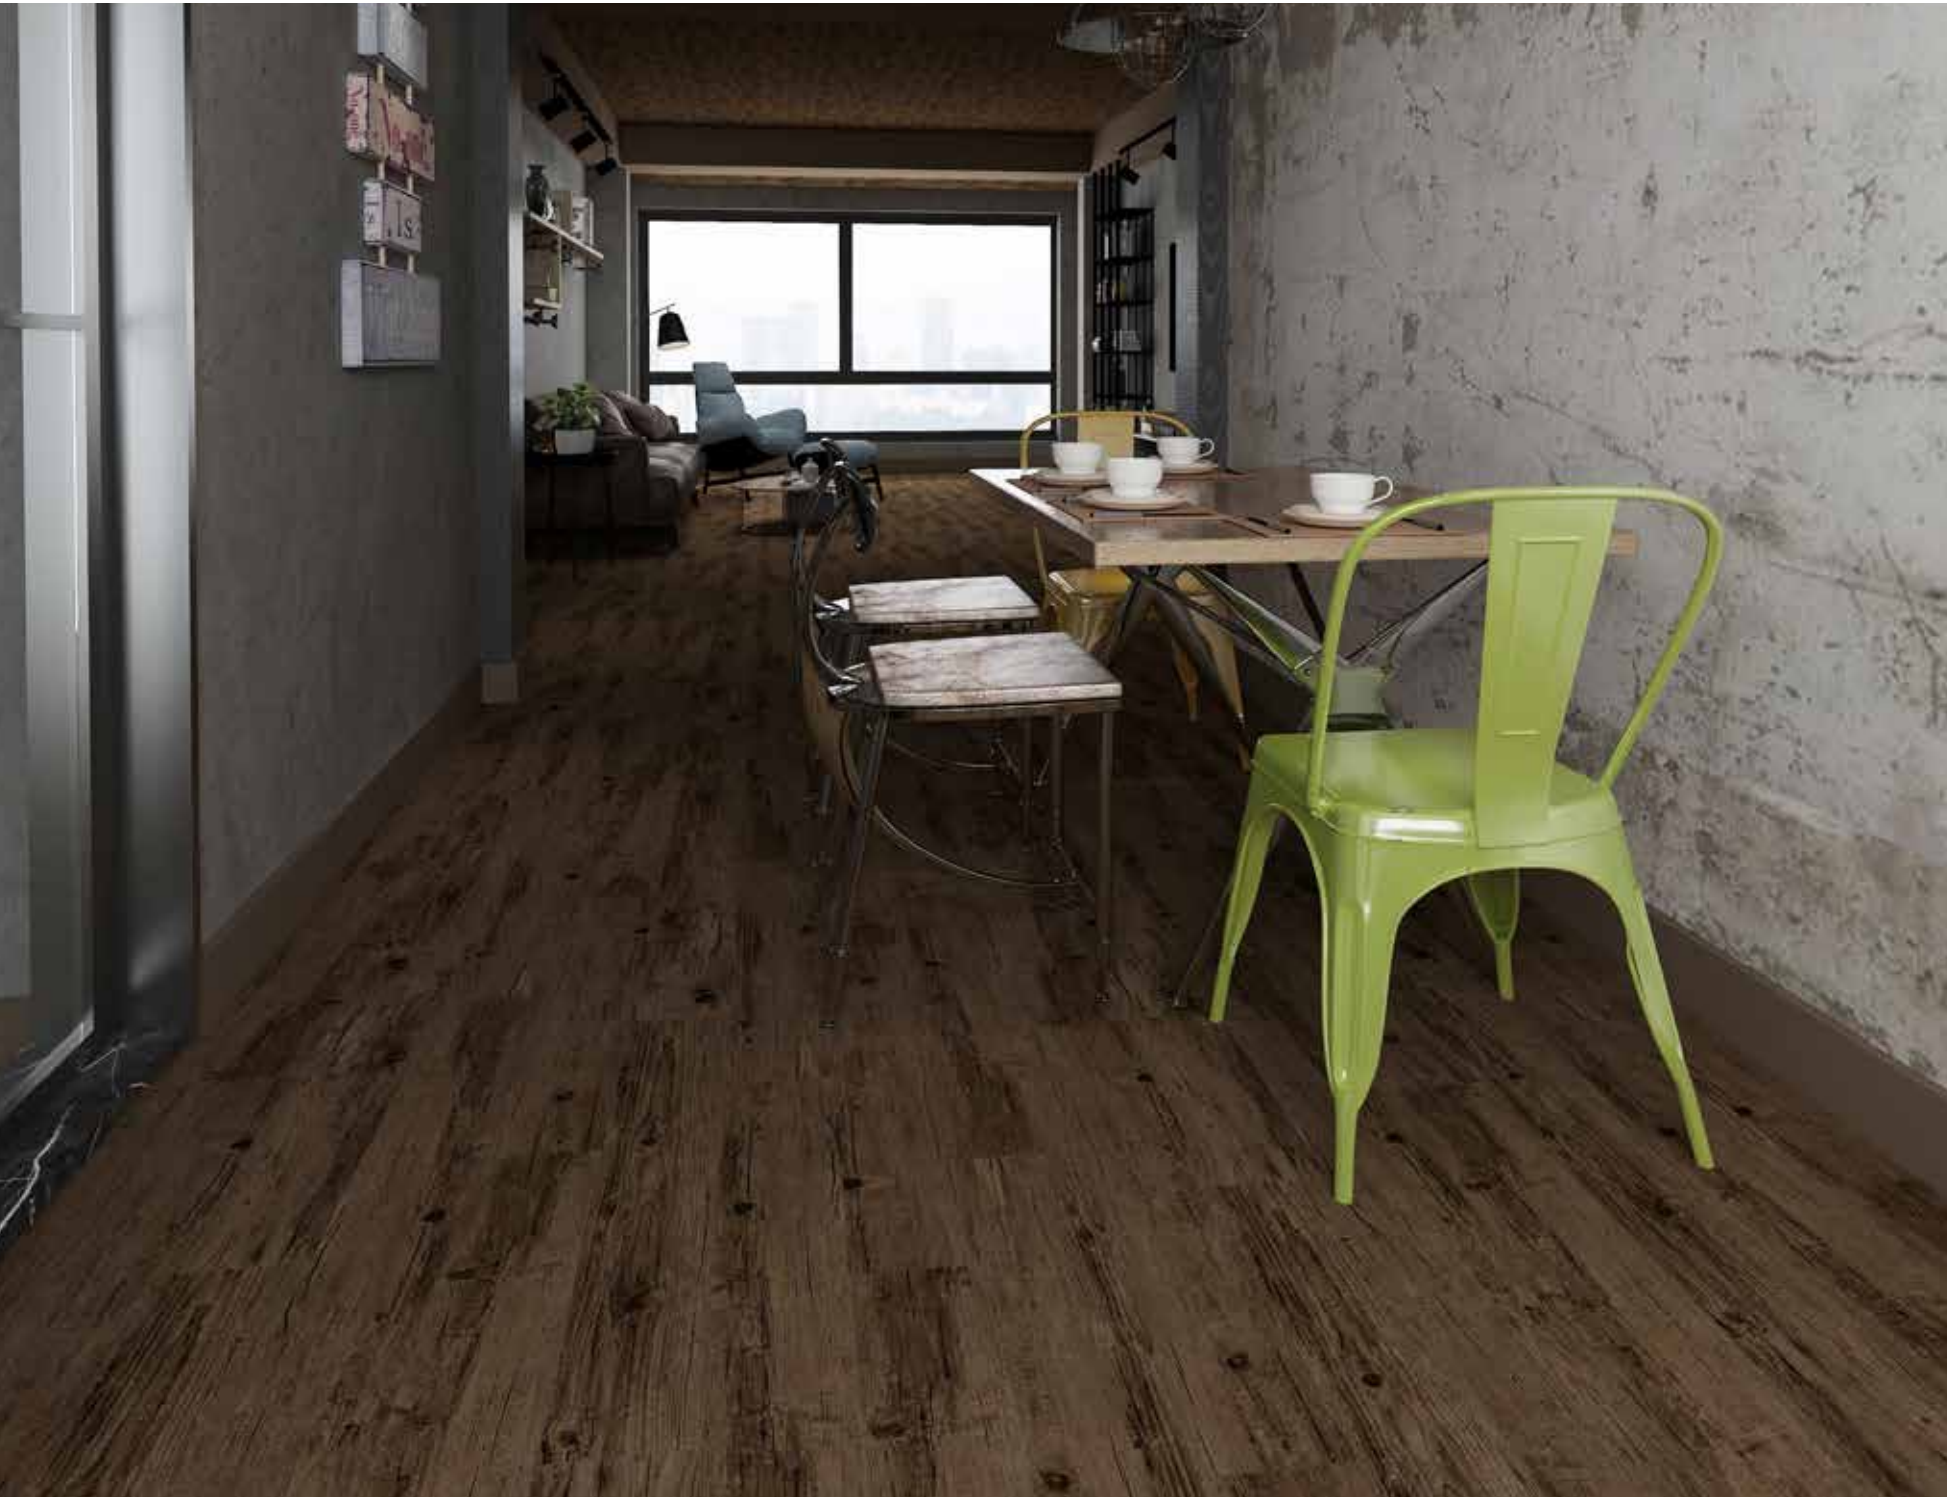

914.4mm (36 inch)

Dimensions



152.4mm (6 inch)

B3

TIMBERWORLD

1.50 mm



914.4mm (36 inch)

Dimensions



152.4mm (6 inch)

B6

TIMBERWORLD
1.50 mm



914.4mm (36 inch)

Dimensions



152.4mm (6 inch)

B8

TIMBERWORLD
1.50 mm



914.4mm (36 inch)

Dimensions



152.4mm (6 inch)

C6

TIMBERWORLD
1.50 mm



914.4mm (36 inch)

Dimensions



152.4mm (6 inch)

NA1

TIMBERWORLD

1.50 mm



914.4mm (36 inch)

Dimensions



152.4mm (6 inch)

NB2

TIMBERWORLD
1.50 mm



914.4mm (36 inch)

Dimensions



152.4mm (6 inch)

NB4

TIMBERWORLD

1.50 mm



914.4mm (36 inch)

Dimensions



152.4mm (6 inch)

ZA3

TIMBERWORLD
1.50 mm



914.4mm (36 inch)

Dimensions



152.4mm (6 inch)

ZA8

TIMBERWORLD

1.50 mm



914.4mm (36 inch)

Dimensions



152.4mm (6 inch)

ZA9

TIMBERWORLD
1.50 mm



914.4mm (36 inch)

Dimensions



152.4mm (6 inch)

ZB5

TIMBERWORLD
1.50 mm



914.4mm (36 inch)

Dimensions



152.4mm (6 inch)

ZB7

TIMBERWORLD is the latest collection of PVC wooden planks. The shades and designs are carefully chosen to complement the natural wood. Manufactured with multi-layer hot press technology, this premium flooring is highly suitable to handle low footfalls. The PUR protection layer ensures trouble free performance and enhance durability. It reduces the noise impact, is trendy, quick to install, easy to use and maintenance free. Finally, Timberworld is termite resistant, moisture resistant & fire resistant. Timberworld planks are recommended for residential and low footfalls areas etc.

PERFORMANCE CHARACTERISTICS

CHARACTERISTICS	TEST METHOD	RESULTS
TYPE OF FLOORING	EN 649	RESILIENT FLOORING
OVERALL THICKNESS	EN 428 / IS: 3464	1.50 mm
DIMENSION (SIZE)	EN 427 / IS: 3464	152.4mm X 914.4mm (6" X 36")
SQUARENESS	IS: 3464	≤ 0.15 mm
WEAR LAYER		0.13 mm
DENSITY	EN 430	2850 g/m²
DIMENSIONAL STABILITY	EN 434	≤ 0.25%
RESIDUAL INDENTATION	EN 433	≤ 0.10 mm
COLOR FASTNESS	ISO 105-B02	CLASS 6
FIRE RATING	EN 13501-1	BflS1
HORIZONTAL & VERTICAL BURNING TEST	IS 15061 - 2002	PASS (ARAI)
PERFORMANCE CLASSIFICATION	EN 685	31/32
ABRASION RESISTANCE	EN: 660-2	WEAR GROUP P
SOUND ABSORPTION	ISO 140-8/EN ISO 717-2	ΔLW=4db
SLIP RESISTANCE	DIN 51130	R9
BEARING CASTOR CHAIR	EN 425	SUITABLE / CONTINUOUS USE
SURFACE PROTECTION	PUR	PUR
PATTERN		Wood and Classic
NO. OF PCS PER BOX & AREA OF BOX		24 PCS/BOX (1 BOX = 3.34 SQ. MTR/36 SQ. FT)



RECOMMENDATION FOR INSTALLATION

Wonderfloor Vinyl Plank must be allowed to relax for 24 hours in room temperature between 18°C and 27°C prior to installation. Vinyl planks are suitable for laying on any surface such as concrete, steel wooden floors etc. provided the sub-floor is even, hard and dry. Damp floors should be dried before the commencement of laying. Before installation, the base floor must be thoroughly clean, dry and free from grease & grit. Wonderfloor recommends use of Fevicol SR 998, Fevicol SR 505 or any other equivalent rubber/acrylic/water based adhesive of similar type.

MAINTENANCE

Do's: • After laying of flooring, the surface should be cleaned daily with damp mop and weekly or fortnightly with soap solution • Prevent point load indentation by covering your furniture legs with rubber stopper caps • To remove stubborn stains, rub the affected area immediately with a soft coir brush or fine steel wool soaked in a warm soap solution • Scuff marks on the floor can be removed with little application of diesel • Use door coir or suitable mats to minimize accumulation of dust on Wonderfloor vinyl flooring • Use water to remove any chemical spill on flooring.
Don'ts: • Do not use any strong detergent, harsh cleaning agent or dry steel wool • Throwing of lighted cigarette butts or match sticks on the floor should be avoided as it could lead to burn marks on the floor • Do not drag any heavy object or furniture on the flooring to avoid scratches on the floor.

For institutional/bulk enquiries, please e-mail : mkt@rmgpoly.com or call : +91 9015313059 (Available between 10am-6.30pm)
For export enquiries, please e-mail : info@rmgpoly.com or call : +91 9873138885

