

**WONDERFLOOR**

[www.wonderfloor.co.in](http://www.wonderfloor.co.in)

**TIMBERWORLD**

1.50 mm

**PUR**



**MADE  
in  
INDIA**

**High Performance  
Luxury Vinyl Planks**

**WONDERFLOOR**


[www.wonderfloor.co.in](http://www.wonderfloor.co.in)

**TIMBERWORLD**

1.50 mm



A2

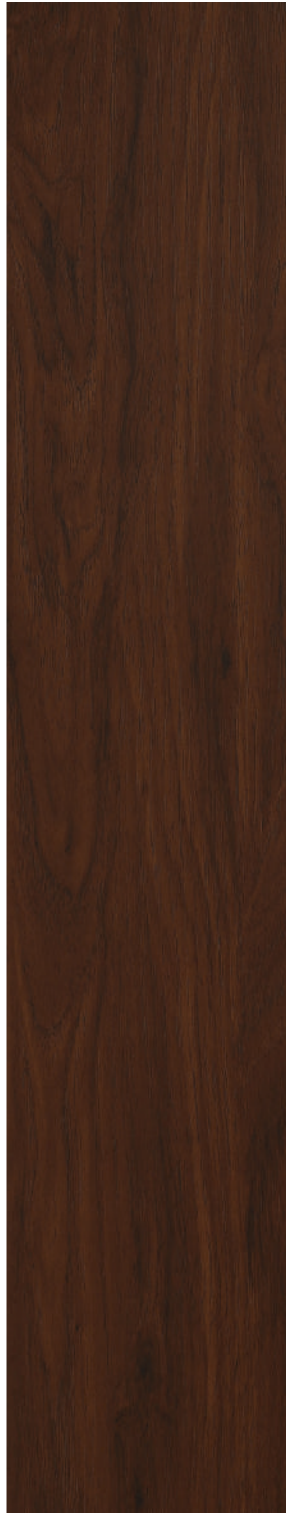

A4



A7



B1

914.4mm (36 inch)

Timberworld Dimensions:




152.4mm (6 inch)

**WONDERFLOOR**


[www.wonderfloor.co.in](http://www.wonderfloor.co.in)

**TIMBERWORLD**

1.50 mm

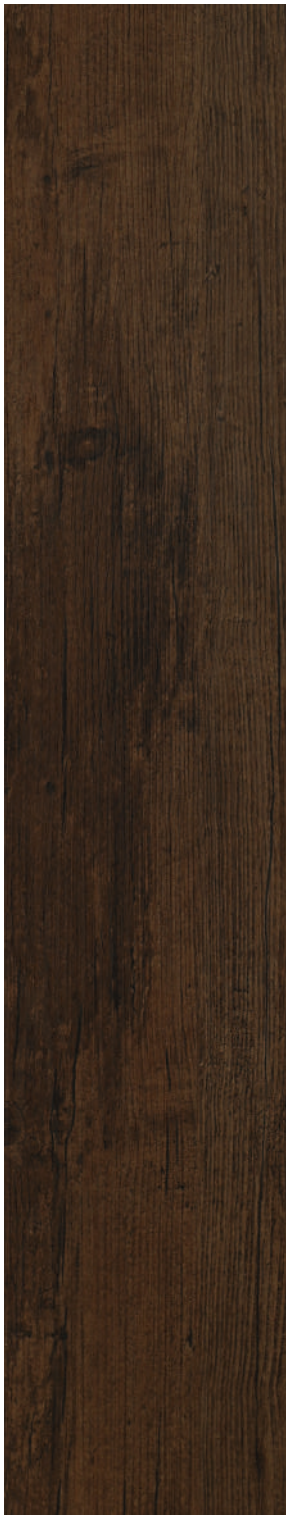

B3

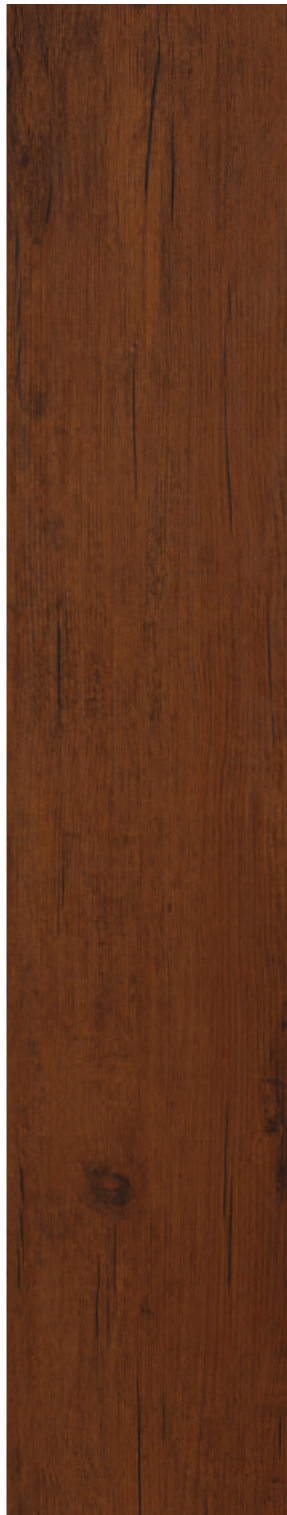

B6



B8



NA 1

914.4mm (36 inch)

Timberworld Dimensions:



152.4mm (6 inch)

**WONDERFLOOR**

[www.wonderfloor.co.in](http://www.wonderfloor.co.in)

**TIMBERWORLD**

1.50 mm



NB 2



NB 4



ZA 3



ZA 5

914.4mm (36 inch)

Timberworld Dimensions:



152.4mm (6 inch)

**WONDERFLOOR**

[www.wonderfloor.co.in](http://www.wonderfloor.co.in)

**TIMBERWORLD**

1.50 mm



ZA 8



ZA 9



ZB 5



ZB 7

914.4mm (36 inch)

Timberworld Dimensions:



152.4mm (6 inch)

**WONDERFLOOR**

www.wonderfloor.co.in

**TIMBERWORLD**

1.50 mm



When you install Wonderfloor products you are helping nature by minimising the usage of wood and natural stones. Our floorings are recyclable which contribute towards conserving nature.



**Fire  
Resistant**



**Termite  
Proof**



**Environment  
Friendly**



**Moisture  
Proof**

**WONDERFLOOR** - The world-class vinyl flooring is a quality product from RMG Polyvinyl India Limited, an ISO 9001:2015 systems certified company. We are the largest manufacturer & exporter of PVC floor coverings, film, sheeting and artificial leather. We manufacture a wide range of vinyl flooring in state-of-the art plant & machinery equipped with latest technology and optimum quality control. Wonderfloor has a wide sales distribution network across India.

**TIMBERWORLD** is the latest collection of PVC wooden planks. The shades and designs are carefully chosen to complement the natural wood. Manufactured with multi-layer technology, this premium flooring is highly suitable to handle heavy footfalls. The PUR protection layer ensures trouble free performance and enhance durability. It reduces the noise impact, is trendy, quick to install, easy to use and maintenance free. Finally, Timberworld is termite resistant, moisture resistant & fire resistant. Timberworld planks are recommended for hotels, stores, malls, cafeteria, schools, banks, homes, offices etc.

## PERFORMANCE CHARACTERISTICS

CHARACTERISTICS	TEST METHOD	TIMBERWORLD
TYPE OF FLOORING	EN649	RESILIENT FLOORING
OVERALL THICKNESS	EN 428	1.50 mm
DIMENSION (SIZE)	EN 427	152.4mm X 914.4mm (6" X 36") 228.60mm x 914.4mm (9"x 36")**
SQAURENESS	IS: 3464	≤ 0.25 mm
WEAR LAYER		0.125 mm
DENSITY	EN 430	2950 g/m <sup>2</sup>
DIMENSIONAL STABILITY	EN 434	≤ 0.25 mm
RESIDUAL INDENTATION	EN 433	≤ 0.10 mm
FLEXIBILITY	EN 435	NO CRACKING USING 20 mm mandrel
COLOR FASTNESS	ISO 105 B02	CLASS 6
FIRE RATING	EN 13501 - 1	Bfl-S1
HORIZONTAL & VERTICAL BURNING TEST	IS 15061 - 2002	PASS (ARAI)
PERFORMANCE CLASSIFICATION	EN 685	31/32
ABRASION RESISTANCE	EN: 660-2	Wear Group P
SOUND ABSORPTION	ISO 140-8/EN ISO 717-2	ΔLW=4db
SLIP RESISTANCE	DIN 51130	R9
BEARING CASTOR CHAIR	EN 425	SUITABLE / CONTINUOUS USE
SURFACE PROTECTION	PUR	PUR
PATTERN		WOOD and CLASSIC
No. OF PCS PER BOX & AREA OF BOX		24 pcs / box = 3.34 sqm / box

\*\*\*against bulk qty



### RECOMMENDATION FOR INSTALLATION

Wonderfloor Vinyl Plank must be allowed to relax for 24 hours in room temperature between 18°C and 27°C prior to installation. Vinyl planks are suitable for laying on any surface such as concrete, steel wooden floors etc. provided the sub-floor is even, hard and dry. Damp floors should be dried before the commencement of laying. Before installation, the base floor must be thoroughly clean, dry and free from grease & grit. Wonderfloor recommends use of Fevicol SR 998, Fevicol SR 505 or any other equivalent rubber/acrylic/water based adhesive of similar type.

### MAINTENANCE

Do's: • After laying of flooring, the surface should be cleaned daily with damp mop and weekly or fortnightly with soap solution • Prevent point load indentation by covering your furniture legs with rubber stopper caps • To remove stubborn stains, rub the affected area immediately with a soft coir brush or fine steel wool soaked in a warm soap solution • Scuff marks on the floor can be removed with little application of diesel • Use door coir or suitable mats to minimize accumulation of dust on Wonderfloor vinyl flooring • Use water to remove any chemical spill on flooring.

Don'ts: • Do not use any strong detergent, harsh cleaning agent or dry steel wool • Throwing of lighted cigarette butts or match sticks on the floor should be avoided as it could lead to burn marks on the floor • Do not drag any heavy object or furniture on the flooring to avoid scratches on the floor.

For institutional/bulk enquiries, please e-mail : [mkt@rmgpoly.com](mailto:mkt@rmgpoly.com)

or call : +91 9711200510

For export enquiries, please e-mail : [info@rmgpoly.com](mailto:info@rmgpoly.com)

or call : +91 9873138885 / +91 9953208740

## RMG POLYVINYL INDIA LIMITED

WONDERFLOOR is the registered Trade Mark of RMG Polyvinyl India Limited

