

WONDERFLOOR


www.wonderfloor.co.in

UTTSAV




Printed Flooring

UTTSAV

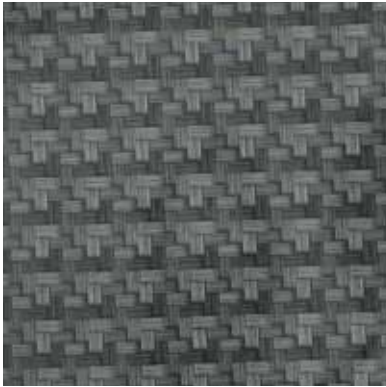

210701

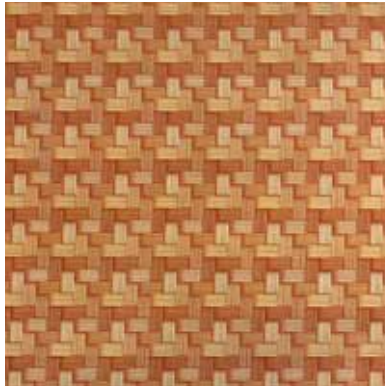

210702



210704



210705



210801



210803



210804



210901



210903



210904



210906



211201

UTTSAV



211202



211204



211205



211301



211306



213610



213611




213612



213613



213802

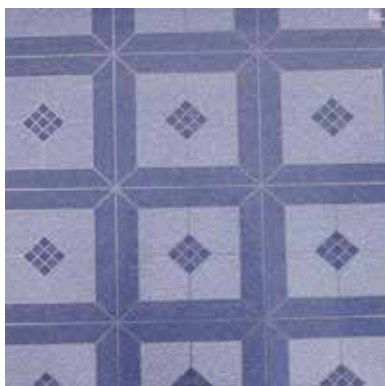


213805



213807

UTTSAV

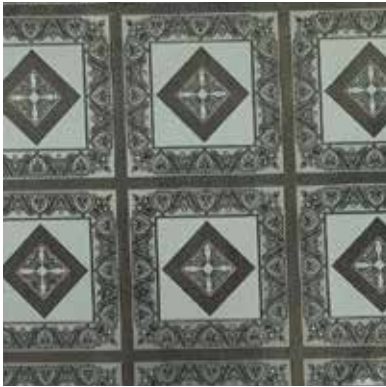

214001



214002




214005



216801




216803

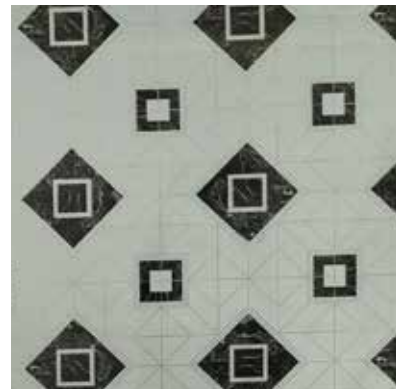

217401



217402

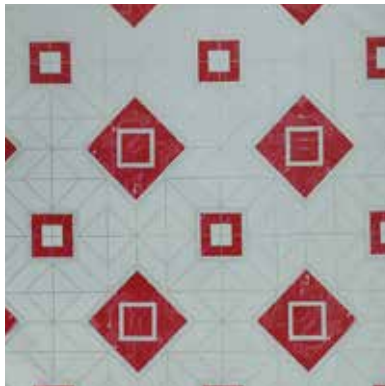

217404



217801



217802



217806



218007

UTTSAV




218008



218009



312104

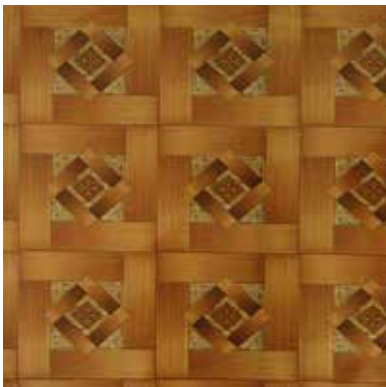


312102



312201



312202

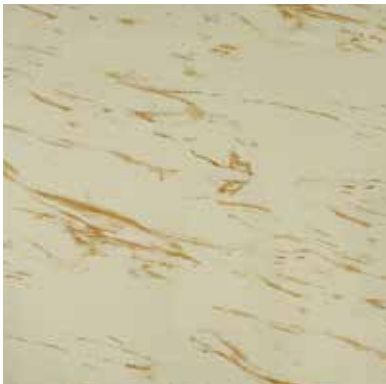

312203



312801



312802



312803



312805




313001


WONDERFLOOR

www.wonderfloor.co.in


UTTSAV

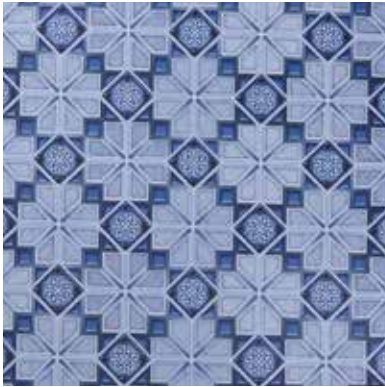

313002

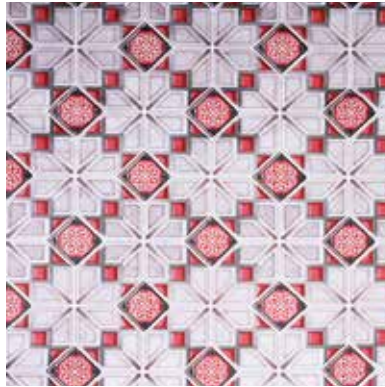

313003

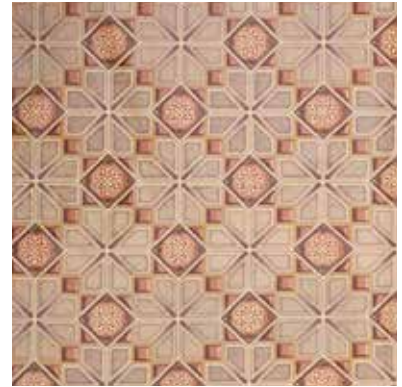

313004



550406



900/1




900/4



900/7



904/9

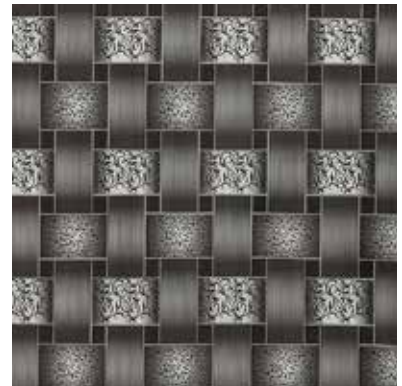

904/10



313401



313403



313404

UTTSAV




313801




313802



313803

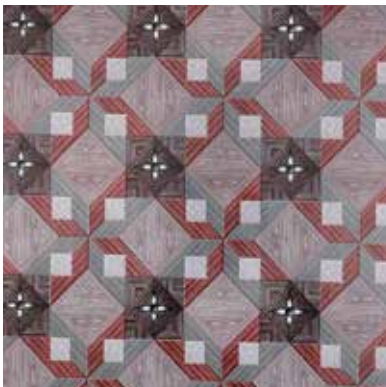

313804

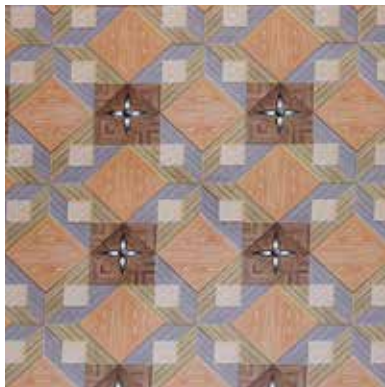

313805



314201



314202



314203



314401



314402



314403



559714

WONDERFLOOR - The world-class vinyl flooring is a quality product from RMG Polyvinyl India Limited, an ISO 9001:2015 systems certified company. We are the largest manufacturer & exporter of PVC floor coverings, film, sheeting and artificial leather. We manufacture a wide range of vinyl flooring in state-of-the art plant & machinery equipped with latest technology and optimum quality control. Wonderfloor has a wide sales distribution network across India.

UTTSAV is a large collection of printed flooring designs. This vinyl flooring is very economical and its wide range of designs makes it ideal for homes and floorings in small shops. Uttsav vinyl flooring is value for your money and is available in a wide range of Stone, Flower & geometrical patterns.

PERFORMANCE CHARACTERISTICS

CHARACTERISTICS	UTTSAV
TYPE	ROLL
THICKNESS (mm)	0.50
ROLL WIDTH (mtr)	1.50 and 2.0
ROLL LENGTH (mtr)	35



RECOMMENDATION FOR INSTALLATION

Wonderfloor must be allowed to relax for 24 hours in room temperature between 18°C and 27°C prior to installation. Vinyl planks are suitable for laying on any surface such as concrete, steel wooden floors etc. provided the sub-floor is even, hard and dry. Damp floors should be dried before the commencement of laying. Before installation, the base floor must be thoroughly clean, dry and free from grease & grit. Wonderfloor recommends use of Fevicol SR 998, Fevicol SR 505 or any other equivalent rubber/acrylic/water based adhesive of similar type.

MAINTENANCE

Do's: • After laying of flooring, the surface should be cleaned daily with damp mop and weekly or fortnightly with soap solution • Prevent point load indentation by covering your furniture legs with rubber stopper caps • To remove stubborn stains, rub the affected area immediately with a soft coir brush or fine steel wool soaked in a warm soap solution • Scuff marks on the floor can be removed with little application of diesel • Use door coir or suitable mats to minimize accumulation of dust on Wonderfloor vinyl flooring • Use water to remove any chemical spill on flooring.
Don'ts: • Do not use any strong detergent, harsh cleaning agent or dry steel wool • Throwing of lighted cigarette butts or match sticks on the floor should be avoided as it could lead to burn marks on the floor • Do not drag any heavy object or furniture on the flooring to avoid scratches on the floor.

For institutional/bulk enquiries, please e-mail : mkt@rmgpoly.com
or call : +91 9015313059 (Available between 10am-6:30pm)
For export enquiries, please e-mail : info@rmgpoly.com or call : +91 9873138885

RMG POLYVINYL INDIA LIMITED
WONDERFLOOR is the registered Trade Mark of RMG Polyvinyl India Limited

