

WONDERFLOOR

www.wonderfloor.co.in

WALLSPRO

PUR

**MADE
in
INDIA**

Wall Coverings

Antibacterial • Anti-Stain • Hard wearing wall coverings




WONDERFLOOR

www.wonderfloor.co.in

WALLSPRO



ROSE WHITE

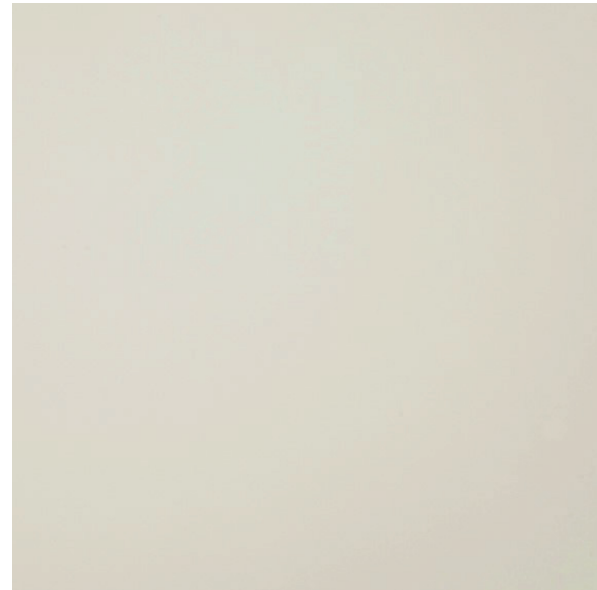

IVORY



FOREST GREEN



NEO BLUE

Salient Features

- Impact resistant
- Antistatic
- Anti bacterial and fungicidal
- Available in a range of soothing pastel shades
- **PUR** surface protection for ease in maintenance with stain resistance
- Glass Fibre Impregnation to provide high dimensional stability
- **Application areas:** Hospitals, dispensaries, pharmaceutical industries, laboratories, blood banks, stores, restaurants kitchens, schools, others etc



Wonderfloor's **Sigma, Trendo & Wallspro range** incorporates **WONDERGUARD** state of the art technology which have exhibited 99.9% inhibition in growth of microbial activity under test conditions and also support clean room condition requirements.

WONDERFLOOR - The world-class vinyl flooring is a quality product from RMG Polyvinyl India Limited, an ISO 9001:2015 systems certified company. We are the largest manufacturer & exporter of PVC floor coverings, film, sheeting and artificial leather. We manufacture a wide range of vinyl flooring in state-of-the art plant & machinery equipped with latest technology and optimum quality control. Wonderfloor has a wide sales distribution network across India.

Wallspro A high-quality Wall Cladding, Wallspro is Antibacterial/Antifungal, flexible, impact-resistant wall covering and is highly recommended for hospitals/clean rooms/pharmaceutical industry. The recurring problem of chipping and peeling off of paints is a challenge for the healthcare industry. Wallspro has become immensely popular in the healthcare industry due to its ease of application, cost-effectiveness and low maintenance. It is easy to install due to its lay-flat properties and it can provide a joint free installation on the walls from one door to another.

PERFORMANCE CHARACTERISTICS

CHARACTERISTICS	TEST METHOD	WALLSPRO
THICKNESS (mm)	EN 428 / ISO 24346	1.20
ROLL WIDTH (mtr)	EN 426 / ISO 24341	2.00
ROLL LENGTH (mtr)	EN 426 / ISO 24341	15
TOTAL WEIGHT (gms/sq mtr)	EN 430 / ISO 23997	1400 gm/m ²
SURFACE PROTECTION	PUR	PUR PROTECTION
SLIP RESISTANCE	DIN 51130 / ASTM D2047	NA
HYGIENE / CLEAN ROOM TEST	ISO 14644-1	Inhibits Growth of Microbes, Class A
RESIDUAL INDENTATION (mm)	EN 433 / ISO 23343-1	≤ 0.10 mm
FLEXIBILITY (mm)	EN 435 / ISO 24344	20 mm MANDREL. PASS
DIMENSIONAL STABILITY (%)	EN 434 / ISO 23999	≤ 0.10%
BEARING CASTOR CHAIR	EN 425 / ISO 4918	NA
SURFACE SPREAD OF FLAME	BS 476 PART 7	CLASS 1
Anti-fungal/Anti-bacterial TEST	ISO846 A,C / ISO 22196	>99% Inhibits Growth
REACTION TO FIRE (kw/m2)	EN ISO 9239-1	Cfl-S1
PERFORMANCE CLASSIFICATION	EN 685 / ISO 10874	32, 33
ABRASION RESISTANCE	EN: 660-2	WEAR GROUP M
SOUND ABSORPTION	ISO 140-8/EN ISO 717-2	Δ LW = 2db
STAIN RESISTANCE	EN 423 / ISO 26987	0, EXCELLENT RESISTANCE
COLOUR FASTNESS	ISO 105-B02	> BLUE WOOL STANDARD 5
MARITIME USAGES		SUITABLE



RECOMMENDATION FOR INSTALLATION

Wonderfloor sheet must be allowed to relax for 24 hours in room temperature between 18°C and 27°C prior to installation. Vinyl rolls are suitable for laying on any surface such as concrete, steel wooden floors etc. provided the sub-floor is even, hard and dry. Damp floors should be dried before the commencement of laying. Before installation, the base floor must be thoroughly clean, dry and free from grease & grit. Wonderfloor recommends use of Fevicol SR 998, Fevicol SR 505 or any other equivalent rubber/acrylic/water based adhesive of similar type.

For institutional/bulk enquiries, please e-mail : mkt@rmgpoly.com
 or call : +91 9711200510
 For export enquiries, please e-mail : info@rmgpoly.com
 or call : +91 9873138885 / +91 9953208740

RMG POLYVINYL INDIA LIMITED

WONDERFLOOR is the registered Trade Mark of RMG Polyvinyl India Limited

